

## MULTI-WAVELENGTH FIBER OPTICAL PARAMETRIC OSCILLATOR BASED ON A HIGHLY NONLINEAR FIBER AND A SAGNAC LOOP FILTER

D. Chen <sup>†</sup>

Institute of Information Optics  
Zhejiang Normal University  
Jinhua 321004, China

B. Sun

Centre for Optical and Electromagnetic Research  
Zhejiang University  
Hangzhou 310058, China

**Abstract**—A novel multi-wavelength fiber optical parametric oscillator (MW-FOPO) with a ring cavity structure is proposed. In the ring cavity of the MW-FOPO, a Sagnac loop filter which is formed by a 3-dB optical coupler, a polarization controller and a segment of polarization maintained fiber is used as the comb filter, and a segment of highly nonlinear fiber is used as the gain medium. Multi-wavelength lasing of the MW-FOPO with a wavelength spacing of about 0.8 nm is achieved and its power stability at room temperature is demonstrated by measuring peak power fluctuation within 42 minutes for 5 lasing wavelengths. The output spectrum of the MW-FOPO covers a large wavelength region from 1500 nm to 1610 nm. A comparison of the output spectra between the MW-FOPO and the multi-wavelength Erbium-doped fiber laser is also presented.

---


*Received 15 June 2010, Accepted 13 July 2010, Scheduled 21 July 2010*

Corresponding author: D. Chen (daru@zjnu.cn).

<sup>†</sup> Also with The Joint Research Laboratory of Optics of Zhejiang Normal University and Zhejiang University.

## 1. INTRODUCTION

This year we welcome the 50th anniversary of the laser technology, which has powered remarkable progress [1–18] in the past 50 years since the invention of the first laser in 1960 [19]. Fiber lasers are one kind of the most important lasers, which also include multi-wavelength fiber lasers (MWFLs) with a huge potential in applications such as WDM optical communication systems, optical fiber sensors, optical component testing, microwave photonics and spectroscopy [20–23]. A great variety of MWFLs have been well developed based on various optical amplifiers including Erbium-doped fiber amplifiers (EDFAs) [24–29], fiber Raman amplifiers (FRAs) [30–33], fiber Brillouin amplifiers (FBAs) [34–36] and semiconductor optical amplifiers (SOAs) [37–40] in the past several years. Thereinto, multi-wavelength Erbium-doped fiber lasers (MW-EDFLs) have been widely investigated due to their advantages such as low cost, low threshold, high power conversion efficiency and compatibility with the optical fiber communication system. However, special approaches such as using the four wave mixing (WFM) effect of special fibers [25–27], the hybrid gain [28], or the frequency-shifted feedback technique [29] should be employed to achieve stable multi-wavelength lasing since MW-EDFLs are not stable at room temperature due to the strong homogenous line broadening and cross-saturation gain of the Erbium-doped fiber (EDF) [41]. The multi-wavelength Raman fiber laser has not been considered as a promising MWFL due to the limited gain bandwidth of the FRA. MWFLs based on the SOA usually suffer from the low output power and MWFLs based on FBAs suffer from the fixed wavelength spacing (determined by the Brillouin shift). Besides the above-mentioned optical amplifiers, fiber optical parametric amplifiers (FOPAs) [42–48] with excellent performances such as high gain, large gain bandwidth, arbitrary center wavelength, low noise figure and compatibility with high power have been well developed particularly after the emergence of the high power EDFA and the highly nonlinear fiber (HNLF) [49, 50], which result in the fast rise of the research on fiber optical parametric oscillators (FOPOs) recently [51–61]. So far, various FOPOs, which include picosecond FOPO [53], femtosecond FOPO [54, 55], Q-switched FOPO [56], wavelength-tunable FOPO [57–59], single-longitudinal-mode FOPO [60] and so on, have been proposed and demonstrated. A multi-wavelength fiber optical parametric oscillator (MW-FOPO) has also been demonstrated by employing a dual-pump FOPA and a superimposed chirped fiber Bragg grating [61], which, however, suffers from the complex structure and limited lasing wavelengths. The performances of the MW-FOPO should be further

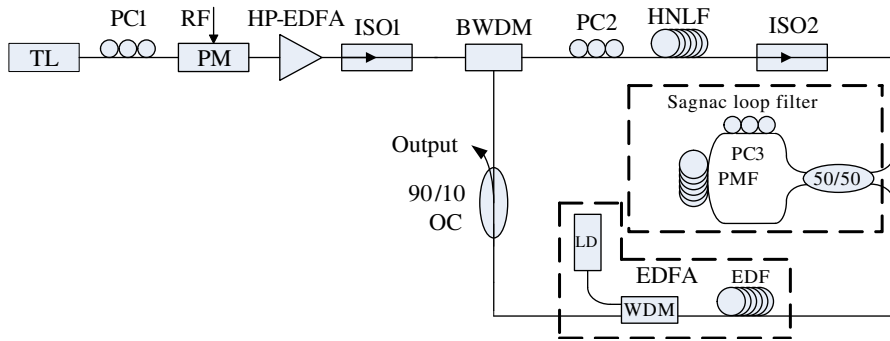

**Figure 1.** Experimental setup of the proposed MW-FOPO. TL: tunable laser; PC: polarization controller; PM: phase modulator; HP-EDFA: high power Erbium-doped fiber amplifier; ISO: isolator; BWDM: broadband wavelength division multiplexer; HNLF: highly nonlinear fiber; OC: optical coupler; PMF: polarization maintained fiber; EDF: Erbium-doped fiber; LD: Laser diode.

improved due to the large gain bandwidth of the FOPA.

In this paper, an MW-FOPO with one pump and a simple ring cavity structure is proposed and demonstrated. A segment of HNLF is used as the gain medium in the MW-FOPO. A Sagnac loop filter which is formed by a 3-dB optical coupler, a polarization controller and a segment of polarization maintained fiber is used as the comb filter in the ring cavity of the MW-FOPO. Stable multi-wavelength lasing with a wavelength spacing of about 0.8 nm in a wide wavelength region from 1500 nm to 1615 nm is achieved at room temperature which benefit from the large gain bandwidth.

## 2. EXPERIMENTAL SETUP AND RESULTS

Figure 1 shows the experimental setup of the proposed MW-FOPO. On the left side of Fig. 1, a tunable laser (TL, Agilent 81940A, with a tunable wavelength region from 1520 nm to 1630 nm) provides the pump seed light. A polarization controller (PC1) is used to align the state of polarization (SOP) of the light from the tunable laser (TL) with the transmission axis of the phase modulator (PM) so as to maximize the modulation depth. The stimulated Brillouin scattering (SBS) effect will results in a very low efficiency of pump light's injecting into the HNLF when we use the amplified pump light from the tunable laser with a very narrow linewidth. Thus, we use a phase modulation method to broaden the linewidth of the pump seed light by employing


a phase modulator (PM) driven by a RF signal of a 3.5-Gb/s- $(2^{31}-1)$  pseudorandom binary sequence (PRBS), which can successfully suppress the SBS when the high power pump light is injected into the HNLF. A high power Erbium-doped fiber amplifier (HP-EDFA) with a maximal output power of 2 W is used to achieve a high power pump light. An optical isolator (ISO1) is used after the HP-EDFA. By way of a broadband wavelength division multiplexer (BWDM), the pump light is injected into the HNLF, which is used as the gain medium of the proposed MW-FOPO. The length, the loss, the zero-dispersion wavelength, the dispersion slope at the zero-dispersion wavelength and the nonlinear coefficient (at 1550 nm) of the HNLF are about 520 m, 0.92 dB/m, 1553.35 nm, 0.016 ps/(nm<sup>2</sup>km) and 15 W<sup>-1</sup>km<sup>-1</sup>, respectively. An optical isolator (ISO2) ensures a clockwise ring cavity and a polarization controller (PC2) is used to adjust the SOP of the lasing light since the FOFA is sensitive to the polarization of both the pump light and the signal light. One arm (with a 10% power ratio) of a 90/10 optical coupler (OC) is used as the output port of the MW-FOPO. A Sagnac loop filter which is formed by a 3-dB optical coupler, a polarization controller and a segment of polarization maintained fiber (PMF) is used as the comb filter in the ring cavity of the MW-FOPO. The wavelength spacing of two adjacent transmission peaks of the Sagnac loop filter is given by [62]

$$\Delta\lambda = \frac{\lambda^2}{\Delta n L} \quad (1)$$

where  $\lambda$  is the wavelength and  $L$  is the length of the PMF. In our experiments, we choose the PMF with a suitable length (about 15 m) to achieve a wavelength spacing of about 0.8 nm around 1550 nm. Fig. 2(a) shows the experimentally measured transmission spectrum of the Sagnac loop filter with the insertion loss of about 3.4 dB, the peak-to-notch contrast ratio of about 18 dB, and the peak fluctuation within 0.2 dB.

In order to show a comparison of the output spectra between the proposed MW-FOPO and the conventional MW-EDFL, Fig. 1 also shows the case when an EDFA formed by a Laser diode (as a pump) with a central wavelength of 1480 nm, a wavelength division multiplexer (WDM) and a segment of EDF is inserted into the ring cavity of the proposed MW-FOPO (building an MW-EDFL when the HP-EDFA is shut down). The length, the numerical aperture, the cutoff wavelength and the peak absorption (at 1531 nm) of the EDF are 6.3 m, 0.25, 950 nm and 19.2 dBm, respectively.

The wavelength of the tunable laser is chosen to be 1555.8 nm due to the dispersion property of the HNLF. The output power of the tunable laser is 6 dBm in our experiments. The HP-EDFA is adjusted

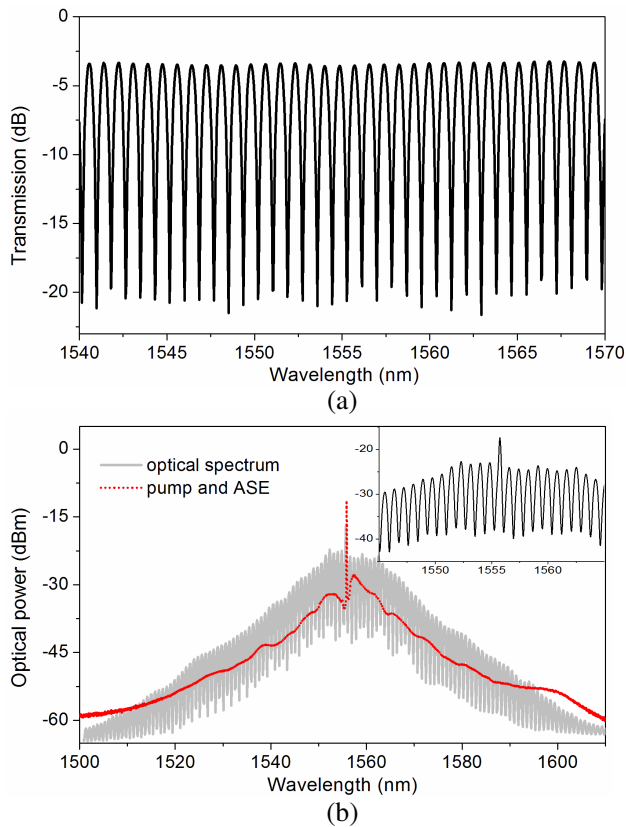


**Figure 2.** (a) Transmission spectrum of the Sagnac loop filter. (b) Spectra of the proposed MW-FOPO (gray solid curve) and the ASE of the FOPA (red dotted curve). Inset shows a local enlargement of the spectrum from 1545 nm to 1565 nm.


to achieve the maximal output power and the pump power after the optical isolator (ISO1) is measured to be about 1.53 W. Note that in our first experiment, the EDFA formed by LD, WDM and a segment of EDF is absent in the ring cavity. By carefully adjusting the three polarization controllers (PC1, PC2, and PC3), stable multi-wavelength lasing of the proposed MW-FOPO is achieved. Fig. 2(b) shows the output spectrum (black solid curve) of the proposed MW-FOPO which covers a wide wavelength region from 1500 nm to 1610 nm. Inset shows a local enlargement of the spectrum from 1545 nm to 1565 nm and one can see that the wavelength spacing of the MW-FOPO is about 0.8 nm (100 GHz at the optical fiber communication window, compatible with

the ITU grid). Note that we use an optical spectrum analyzer (OSA) (Ando, AQ6317) with a resolution of 0.01 nm in our experiments. The large lasing wavelength region of the proposed MW-FOPO is mainly due to the large gain bandwidth of the FOPA based on the HNLF in the proposed MW-FOPO. The red dotted curve in Fig. 2(b) shows the amplified spontaneous emission (ASE) spectrum when the pump light is directly injected into the HNLF, where one can see that the envelope profile of the output spectrum of the MW-FOPO is similar as the ASE spectrum profile of an FOPA based on the HNLF.

Besides the large lasing wavelength region, power stability is also one of the most important properties of the MWFLs for practical applications. It is well known that the EDFA suffers from the strong homogenous line broadening at room temperature and the cross-saturation gain for signals with different wavelengths, which results in poor stability of the MW-EDFL. However, the FOPA exhibits the inhomogenous line broadening at room temperature and the cross-saturation gain appears markedly only when the signal power is comparable with the pump power. In addition, the FWM effect in the ring cavity of the MW-FOPO provides self-stability of multi-wavelength lasing, which has been well demonstrated in some MW-EDFLs [25–27]. The power stability of the proposed MW-FOPO is also demonstrated in our experiment. We use the OSA to repeatedly scan the output spectrum of the MW-FOPO per 3 minutes within 42 minutes for the 5 lasing wavelengths. Fig. 3 shows the peak power fluctuation of the 5 lasing wavelengths of the MW-FOPO within 42 minutes and the maximal peak power fluctuation is less than 0.4 dB, which shows

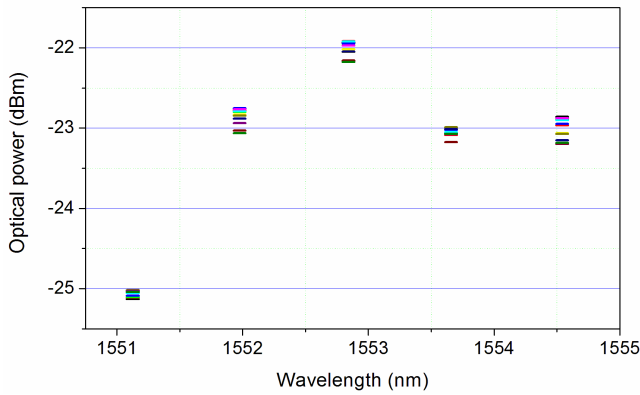

**Figure 3.** Peak power fluctuation within 42 minutes for the 5 lasing wavelengths of the proposed MW-FOPO.

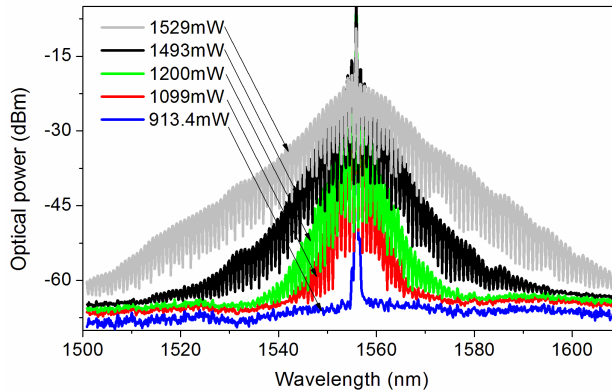


**Figure 4.** Output spectra of the proposed MW-FOPO when the pump power are 0.913 W, 1.099 W, 1.200 W, 1.493 W and 1.529 W, respectively.

the proposed MW-FOPO is quite stable at room temperature.

Besides the power stability, the FWM effect in the ring cavity of the MW-FOPO will also contribute to the power uniformity of each lasing wavelength. Fig. 4 shows the output spectra of the proposed MWFOPO when the pump power are 0.913 W, 1.099 W, 1.200 W, 1.493 W and 1.529 W, respectively. The envelope profile of the output spectrum of the MW-FOPO becomes flattened when the pump power increases. It is expected that uniform and stable multi-wavelength lasing can be achieved in a larger wavelength region when a pump (HP-EDFA) with a higher output power is used in the proposed MW-FOPO.

A comparison of the output spectra between the MW-FOPO and the MW-EDFL is also introduced in this paper. We show three different cases for the experimental setup in Fig. 1: Case I, the proposed MW-FOPO with the gain of only FOPA when the HP-EDFA is switched on and the EDFA is not inserted into the ring cavity; Case II, the MW-FOPO with the gain of both FOPA and EDFA when the HP-EDFA is switched on and the EDFA is also inserted into the ring cavity; Case III, the MW-EDFL with the gain of only EDFA when the HP-EDFA is switched off and the EDFA is inserted into the ring cavity. Fig. 5 shows the output spectra for the three cases. Evidently, the lasing wavelength region of the MW-EDFL is the smallest one although the multi-wavelength lasing is stable at room temperature due to the FWM effect of the HNLF in the ring cavity.

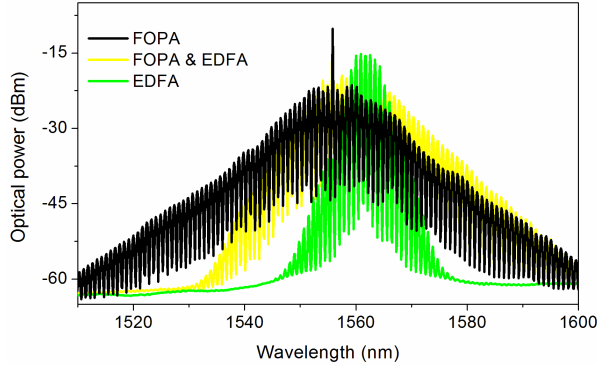

**Figure 5.** Spectra of the proposed MW-FOPO with the gain of only FOPA (black curve) or the gain of FOPA and EDFA (yellow curve), and the MW-EDFL (green curve).

### 3. DISCUSSION AND CONCLUSION

Regarding the MWFL, the lasing wavelength region, the power stability, and the flexible wavelength spacing are the most important properties. The lasing wavelength region and the power stability of the MWFL mainly depend on the property of the optical amplifier used in the MWFL. Thanks to the recent development of the HP-EDFAs and the HNLFs (which also include the highly nonlinear photonic crystal fibers), FOPAs have exhibited excellent performances such as high gain, large gain bandwidth, arbitrary center wavelength, low noise figure and compatibility with high power, which are very appreciated to achieve MWFLs, namely, MW-FOPOs. In this paper, we have shown the lasing wavelengths of the MW-FOPO covers a large wavelength region which is much larger than the conventional MW-EDFL. The wavelength spacing of the MWFL depends on the comb filter used in the MWFL. A Sagnac loop filter is suitable for applications in FWFLs due to its advantages such as fiber compatibility, high power compatibility and flexible control of the wavelength spacing. Thus, the proposed MW-FOPO with a Sagnac loop filter could be one of the most promising MWFLs.

In conclusion, we have proposed and demonstrated an MW-FOPO based on an HNLF and a Sagnac loop filter. Stable multi-wavelength lasing at room temperature has been achieved. The wavelength spacing of the proposed MW-FOPO is about 0.8 nm. The output spectrum of the MW-FOPO covers a large wavelength region from 1500 nm to 1610 nm, which is much larger than that of the conventional MW-EDFL.



## ACKNOWLEDGMENT

Authors should thank Dr. Kenneth K. Y. Wong for helpful discussions.

This work is supported partially by Program for Science and Technology Innovative Research Team in Zhejiang Normal University, Zhejiang Provincial Natural Science Foundation of China (No. Y1090379), and Natural Science Foundation of China under projects (No. 60907020).

## REFERENCES

1. Littman, M. G. and H. J. Metcalf, "Spectrally narrow pulsed dye laser without beam expander," *Appl. Opt.*, Vol. 17, 2224–2227, 1978.
2. Tajima, T. and J. M. Dawson, "Laser electron accelerator," *Phys. Rev. Lett.*, Vol. 43, 267–270, 1979.
3. Wittman, W. J., "The CO<sub>2</sub> laser," *Springer Series in Optical Sciences*, Vol. 53, Springer-Verlag, Berlin and New York, 1987.
4. Agrawal, G. P. and N. K. Dutta, *Long Wavelength Semiconductor Lasers*, Van Nostrand Reinhold Co. Inc., New York, NY, 1986.
5. Numai, T., *Fundamentals of Semiconductor Lasers*, Springer, New York, 2004.
6. Koechner, W., *Solid-state Laser Engineering*, Springer Science & Business Media, Inc., 2006.
7. Arakawa, Y. and H. Sakaki, "Multidimensional quantum well laser and temperature dependence of its threshold current," *Appl. Phys. Lett.*, Vol. 40, 939–941, 1982.
8. Denk, W., J. H. Strickler, and W. W. Webb, "Two-photon laser scanning fuorescence microscopy," *Science*, Vol. 248, 73–76, 1990.
9. Meng, X. G., J. R. Qiu, M. Y. Peng, D. P. Chen, Q. Z. Zhao, X. W. Jiang, and C. S. Zhu, "Near infrared broadband emission of bismuth-doped aluminophosphate glass," *Opt. Express*, Vol. 13, 1628–1634, 2005.
10. Ball, G. A. and W. W. Morey, "Compression-tuned single-frequency Bragg grating fiber laser," *Opt. Lett.*, Vol. 19, 1979–1981, 1994.
11. Limpert, J., T. Schreiber, S. Nolte, H. Zellmer, A. Tünnermann, R. Iliew, F. Lederer, J. Broeng, G. Vienne, A. Petersson, and C. Jakobsen, "High-power air-clad large-mode-area photonic crystal fiber laser," *Opt. Express*, Vol. 11, 818–923, 2003.
12. Jeong, Y., J. K. Sahu, D. N. Payne, and J. Nilsson, "Ytterbium-

- doped large-core fiber laser with 1.36 kW continuous-wave output power,” *Opt. Express*, Vol. 12, 6088–6092, 2004.
13. Huber, R., M. Wojtkowski, and J. G. Fujimoto, “Fourier domain mode locking (FDML): A new laser operating region and applications for optical coherence tomography,” *Opt. Express*, Vol. 14, 3225–3237, 2006.
  14. Wang, M. J., Z. S. Wu, Y. L. Li, and G. Zhang, “High resolution range profile identifying simulation of laser radar based on pulse beam scattering characteristics of targets,” *Progress In Electromagnetics Research*, Vol. 96, 193–204, 2009.
  15. Shwetanshumala, S. Jana, and S. Konar, “Propagation of a mixture of modes of a laser beam in a medium with saturable nonlinearity,” *Journal of Electromagnetic Waves and Applications*, Vol. 20, No. 1, 65–77, 2006.
  16. Fu, X., C. Cui, and S. C. Chan, “Optically injected semiconductor laser for photonic microwave frequency mixing in radio-over-fiber,” *Journal of Electromagnetic Waves and Applications*, Vol. 24, No. 7, 849–860, 2010.
  17. Wei, H. Y. and Z. S. Wu, “Study on the effect of laser beam propagation on the slant path through atmospheric turbulence,” *Journal of Electromagnetic Waves and Applications*, Vol. 22, No. 5/6, 787–802, 2008.
  18. Li, J., J. Wang, and F. Jing, “Improvement of coiling mode to suppress higher-order-modes by considering mode coupling for large-mode-area fiber laser,” *Journal of Electromagnetic Waves and Applications*, Vol. 24, No. 8/9, 1113–1124, 2010.
  19. Maiman, T. H., “Stimulated optical radiation in ruby masers,” *Nature*, Vol. 187, 439–440, 1960.
  20. Han, Y., T. V. A. Tran, S. Kim, and S. B. Lee, “Multiwavelength Raman-fiber-laser-based long-distance remote sensor for simultaneous measurement of strain and temperature,” *Opt. Lett.*, Vol. 30, 1282–1284, 2005.
  21. Ou, H., H. Fu, D. Chen, and S. He, “A tunable and reconfigurable microwave photonic filter based on a Raman fiber laser,” *Opt. Commun.*, Vol. 178, No. 1, 48–51, 2007.
  22. Shen, G. F., X. M. Zhang, H. Chi, and X. F. Jin, “Microwave/millimeter-wave generation using multi-wavelength photonic crystal fiber Brillouin laser,” *Progress In Electromagnetics Research*, Vol. 80, 307–320, 2008.
  23. Liu, S. C., Z. W. Yin, L. Zhang, X. F. Chen, L. Gao, and J. C. Cheng, “Dual-wavelength FBG laser sensor based on

- photonic generation of radio frequency demodulation technique,” *Journal of Electromagnetic Waves and Applications*, Vol. 23, No. 16, 2177–2185, 2009.
24. Moon, D. S., U.-C. Paek, and Y. Chang, “Multi-wavelength lasing oscillations in an Erbium-doped fiber laser using few-mode fiber Bragg grating,” *Opt. Express*, Vol. 12, 6147–6152, 2004.
  25. Liu, X., X. Yang, F. Lu, J. Ng, and X. Zhou, “Stable and uniform dual-wavelength Erbium-doped fiber laser based on fiber Bragg gratings and photonic crystal fiber,” *Opt. Express*, Vol. 13, 142–147, 2006.
  26. Han, Y.-G., T. V. A. Tran, and A. B. Lee, “Wavelength-spacing tunable multi-wavelength Erbium-doped fiber laser based on four-wave mixing of dispersion-shifted fiber,” *Opt. Lett.*, Vol. 31, 697–699, 2006.
  27. Chen, D., “Stable multi-wavelength erbium-doped fiber laser based on a photonic crystal fiber Sagnac loop filter,” *Laser Phys. Lett.*, Vol. 4, 437–439, 2007.
  28. Qin, S., D. Chen, Y. Tang, and S. He, “Stable and uniform multi-wavelength fiber laser based on hybrid Raman and Erbium-doped fiber gains,” *Opt. Express*, Vol. 14, 10522–10527, 2006.
  29. Yamashita, S. and T. Baba, “Spacing-tunable multiwavelength fiber laser,” *Electron. Lett.*, Vol. 37, 1015–1517, 2001.
  30. De Matos, C. J. S., D. A. Chestnut, P. C. Reeves-Hall, F. Koch, and J. R. Taylor, “Multi-wavelength, continuous wave fibre Raman ring laser operating at 1.55  $\mu\text{m}$ ,” *Electron. Lett.*, Vol. 37, 825–826, 2001.
  31. Han, Y.-G., C.-S. Kim, J. U. Kand, U.-C. Paek, and Y. Chung, “Multiwavelength Raman fiber-ring laser based on tunable cascaded logn-period fiber gratings,” *IEEE Photon. Technol. Lett.*, Vol. 15, 383–385, 2003.
  32. Dong, X. Y., P. Shum, N. Q. Ngo, and C. C. Chan, “Multiwavelength Raman fiber laser with a continuously-tunable spacing,” *Opt. Express*, Vol. 14, 3288–3293, 2006.
  33. Chen, D., S. Qin, L. Shen, H. Chi, and S. He, “An all-fiber multi-wavelength raman laser based on a PCF sagnac loop filter,” *Microw. and Opt. Techn. Lett.*, Vol. 48, 2416–2418, 2006.
  34. Cowle, G. J. and D. Y. Stepanov, “Multiple wavelength generation with Brillouin/erbium fiber lasers,” *IEEE Photon. Technol. Lett.*, Vol. 8, 1465–1467, 1996.
  35. Bumki, M., P. Kim, and N. Park, “Flat amplitude equal spacing 798-channel Rayleigh-assisted Brillouin/Raman multiwavelength

- comb generation in dispersion compensating fiber,” *IEEE Photon. Technol. Lett.*, Vol. 13, 1352–1354, 2001.
36. Ahmad, H., M. Z. Zulkifli, S. F. Norizan, A. A. Latif, and S. W. Harun, “Controllable wavelength channels for multiwavelength Brillouin Bismuth/Erbium based fiber laser,” *Progress In Electromagnetics Research Letters*, Vol. 9, 9–18, 2009.
  37. Qureshi, K. K., H. Y. Tam, W. H. Chung, and P. K. A. Wai, “Multiwavelength laser source using linear optical amplifier,” *IEEE Photon. Technol. Lett.*, Vol. 17, 1611–1613, 2005.
  38. Lee, Y. W., J. Jung, and B. Lee, “Multiwavelength-switchable SOA-fiber ring laser based on polarization-maintaining fiber loop mirror and polarization beam splitter,” *IEEE Photon. Technol. Lett.*, Vol. 16, 54–56, 2004.
  39. Liu, D., N. Q. Ngo, H. Liu, and D. Liu, “Stable multiwavelength fiber ring laser with equalized power spectrum based on a semiconductor optical amplifier,” *Opt. Commun.*, Vol. 282, 1598–1601, 2009.
  40. Zhang, Z., W. Jian, K. Xu, X. Hong, and J. Lin, “Tunable multiwavelength SOA fiber laser with ultra-narrow wavelength spacing based on nonlinear polarization rotation,” *Opt. Express*, Vol. 17, 17200–17205, 2009.
  41. Pan, S. L., C. Y. Lou, and Y. Z. Gao, “Multiwavelength Erbium-doped fiber laser based on inhomogeneous loss mechanism by use of a highly nonlinear fiber and a Fabry-Perot filter,” *Opt. Express*, Vol. 14, 1113–1118, 2006.
  42. Marhid, M. E., K. K.-Y. Wong, G. Kalogerakis, and L. G. Kazovsky, “Toward practical fiber optical parametric amplifiers and oscillators,” *Optics & Photonics News*, 21–25, 2004.
  43. Ho, M., K. Uesaka, Y. Akasaka, and L. G. Kazovsky, “200-nm-bandwidth fiber optical amplifier combing parametric and Raman gain,” *J. Lightwave Technol.*, Vol. 19, 977–981, 2001.
  44. Wong, K. K.-Y., K. Shimizu, K. Uesaka, G. Kalogerakis, M. E. Marhic, and L. G. Kazovsky, “Continuous-wave fiber optical parametric amplifier with 60-dB gain using a novel two segment design,” *IEEE Photon. Technol. Lett.*, Vol. 15, 1707–1709, 2003.
  45. Gao, M., C. Jiang, W. Hu, and J. Wang, “Optimized design of two-pump fiber optical parametric amplifier with two-section nonlinear fibers using genetic algorithm,” *Opt. Express*, Vol. 12, 5603–5613, 2004.
  46. Dahan, D. and G. Eisenstein, “Tunable all optical delay via slow and fast light propagation in a Raman assisted fiber optical

- parametric amplifier: A route to all optical buffering,” *Opt. Express*, Vol. 13, 6234–6249, 2005.
47. Torounidis, T., P. A. Andrekson, and B. Olsson, “Fiber-optical parametric amplifier with 70-dB gain,” *IEEE Photon. Technol. Lett.*, Vol. 18, 1194–1196, 2006.
  48. Wong, K. K. Y., G. Lu, and L. Chen, “Polarization-interleaved WDM signals in a fiber optical parametric amplifier with orthogonal pumps,” *Opt. Express*, Vol. 15, 56–61, 2007.
  49. Singh, S. P., R. Gangwar, and N. Singh, “Nonlinear scattering effects in optical fibers,” *Progress In Electromagnetics Research*, Vol. 74, 379–405, 2007.
  50. Andalib, A., A. Rostami, and N. Grangpayeh, “Analytical investigation and evaluation of pulse broadening factor propagating through nonlinear optical fibers (traditional and optimum dispersion compensated fibers),” *Progress In Electromagnetics Research*, Vol. 79, 119–136, 2008.
  51. Lasri, J., P. Devgan, R. Tang, J. E. Sharping, and P. Kumar, “A microstructure-fiber-based 10-GHz synchronized tunable optical parametric oscillator in the 1550-nm region,” *IEEE Photon. Technol. Lett.*, Vol. 15, 1058–1060, 2003.
  52. De Matos, C. J. S., J. R. Taylor, and K. P. Hansen, “Continuous-wave, totally fiber integrated optical parametric oscillator using holey fiber,” *Opt. Lett.*, Vol. 29, 983–985, 2004.
  53. Zhou, Y., K. K. Y. Cheung, S. Yang, P. C. Chui, and K. K. Y. Wong, “Widely tunable picosecond optical parametric oscillator using highly nonlinear fiber,” *Opt. Lett.*, Vol. 34, 989–992, 2009.
  54. Sharping, J. E., J. R. Sanborn, M. A. Foster, D. Broaddus, and A. L. Gaeta, “Generation of sub-100-fs pulses from a microstructure-fiber-based optical parametric oscillator,” *Opt. Express*, Vol. 16, 18050–18056, 2008.
  55. Sharping, J. E., C. Pailo, C. Gu, L. Kiani, and J. R. Sanborn, “Microstructure fiber optical parametric oscillator with femtosecond output in the 1200 to 1350 nm wavelength range,” *Opt. Express*, Vol. 18, 3911–3916, 2010.
  56. Zhuang, W. Z., W. C. Huang, Y. P. Huang, K. W. Su, and Y. F. Chen, “Passively Q-switched photonic crystal fiber laser and intracavity optical parametric oscillator,” *Opt. Express*, Vol. 18, 8969–8975, 2010.
  57. Wong, G. K. L., S. G. Murdoch, R. Leonhardt, J. D. Harvey, and V. Marie, “High-conversion-efficiency widely-tunable all-fiber

- optical parametric oscillator,” *Opt. Express*, Vol. 15, 2947–2952, 2007.
58. Xu, Y. Q., S. G. Murdoch, R. Leonhardt, and J. D. Harvey, “Widely tunable photonic crystal fiber Fabry-Perot optical parametric oscillator,” *Opt. Lett.*, Vol. 33, 1351–1353, 2008.
  59. Xu, Y. Q., S. G. Murdoch, R. Leonhardt, and J. D. Harvey, “Raman-assisted continuous-wave tunable all-fiber optical parametric oscillator,” *J. Opt. Soc. Am. B*, Vol. 26, 1351–1356, 2009.
  60. Yang, S., X. Xu, Y. Zhou, K. K. Y. Cheung, and K. K. Y. Wong, “Continuous-wave single-longitudinal-mode fiber-optical parametric oscillator with reduced pump threshold,” *IEEE Photon. Technol. Lett.*, Vol. 21, 1870–1872, 2009.
  61. Luo, Z., W. D. Zhong, Z. Cai, C. Ye, H. Xu, X. Dong, and L. Xia, “Multiwavelength fiber optical parametric oscillator,” *IEEE Photon. Technol. Lett.*, Vol. 21, 1609–1611, 2009.
  62. Kim, D. H. and J. U. Kang, “Sagnac loop interferometer based on polarization maintaining photonic crystal fiber with reduced temperature sensitivity,” *Opt. Express*, Vol. 12, 4490–4495, 2004.