

Novel Multi-Target Tracking Algorithm for Automotive Radar

Xun Gong, Ze-Long Xiao*, and Jian-Zhong Xu

Abstract—Tracking multiple maneuvering targets for automotive radar is a vital issue. To this end, a novel DS-UKGMPHD algorithm which combines diagraph switching (DS), unscented Kalman (UK) filter and Gaussian mixture probability hypothesis density (GMPHD) filter is proposed in this paper. The algorithm is capable of tracking a varying number of target cars detected by automotive radar with nonlinear measurement models in a cluttered environment. In addition, variable structure is used to accommodate various target motions in real world. Simulation results demonstrate the superiority of the presented algorithm to IMM-UKGMPHD filter in terms of estimation accuracy of both number and states.

1. INTRODUCTION

Accuracy and timeliness constitute two significant factors for automotive radar. Accordingly, the main goal of this paper is to track multiple targets detected by automotive radar, in other words, to estimate the number and positions of the detected vehicles reliably and timely and thereby reducing false alarm rate and reaction time in cluttered road environment.

To this end, two kinds of algorithms are introduced by relevant documental materials. Classic solution [1, 2] to multi-target tracking for automotive radar involves data association, track management and single-target Bayesian filtering. However, data association algorithms suffer from intensive computation burden, especially when the number of targets gets large. Another solution to multi-target tracking for automotive radar is based on Random Finite Set (RFS) theory, namely the popular probability hypothesis density (PHD) filter [3], with both Gaussian mixture PHD (GMPHD) filter [4] and Sequential Monte Carlo PHD (SMC PHD) filter [5–7] as implementations, and cardinalized PHD (CPHD) filter [8], tracks targets with a varying number without data association or target management. Considering the timeliness, the GMPHD filter is a suboptimal but computationally tractable alternative. It recursively propagates the first-order moment of the multi-target posterior [9]. Whereas problems exist in this filter: firstly, automotive radar tracks the targets in polar coordinates, which makes measurement equations nonlinear in Cartesian coordinates. Secondly, one single model can hardly describe real-world maneuvering targets. In view of these demerits, the IMM-GMUKPHD filter was proposed [10]. However, only two models are used in [10]. When more models are taken into account, the IMM algorithm featuring a fixed model set structure can lead to a dilemma: On one hand, a large model set may cover various behaviors of the cars. On the other hand, for a certain motion, a large set of models leads to heavy computation load and accuracy reduction.

To overcome the contradiction, a hybrid algorithm, whose framework is based on graph-theoretic MM approach, is proposed in this paper. Combining unscented probability hypothesis density filter with diagraph switching (DS) [11], a variable structure multiple model algorithm, the presented algorithm determines certain subset of the total model-set in real time before IMM-UKGMPHD algorithm is implemented.

Received 18 December 2015, Accepted 3 February 2016, Scheduled 10 February 2016

* Corresponding author: Zelong Xiao (zelongxiao@mail.njust.edu.cn).

The authors are with the School of Electronic Engineering and Optoelectronic Technology, Nanjing University of Science and Technology, Nanjing 210094, China.

The layout of this paper is as follows. In Section 2, the problem of multi-target tracking for automotive radar is formulated. Section 3 describes the DS-UKGMPHD filter in detail. Simulation and discussion are given in Section 4. Finally, concluding remarks are presented in Section 5.

2. PROBLEM FORMULATION

In the application of an anti-collision system, target vehicles in front of the radar carrying vehicle are detected. Generally, the motion of the i th target in the xy -plane can be described as

$$x_k^i = F_{k,m}^i(x_{k-1}^i) + \Gamma_k w_{k,m}^i \quad (1)$$

where $\Gamma_k = \begin{bmatrix} T^2/4 & 0 \\ T/2 & 0 \\ 0 & T^2/4 \\ 0 & T/2 \\ 1 & 0 \\ 0 & 1 \end{bmatrix}$ is the input matrix. $x_k^i = [x, \dot{x}, y, \dot{y}, \ddot{x}, \ddot{y}]^T$ denotes the six-dimensional

state vector of the target at time kT (k is the time index and T is the sampling interval). The variables (x, y) , $(\dot{x}, \dot{y})$ and $(\ddot{x}, \ddot{y})$ in the state vector x_k^i represent the target position, velocity and acceleration in the x and y directions respectively. The process noise $w_{k,m}^i$ is a vector of input white noise with zero mean, $w_{k,m}^i \sim N(0, Q)$, where Q denotes the process noise covariance. m represents the index of the models. The state transition matrices are defined as

$$F_{k,\phi}^l = \begin{bmatrix} 1 & \sin \omega / \omega & 0 & -(1 - \cos \omega) / \omega & 0 & 0 \\ 0 & \cos \omega & 0 & -\sin \omega & 0 & 0 \\ 0 & (1 - \cos \omega) / \omega & 1 & \cos \omega & 0 & 0 \\ 0 & \sin \omega & 0 & \cos \omega & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix} \quad (2)$$

$$F_{k,5}^i = \begin{bmatrix} 1 & T & 0 & 0 & T^2/2 & 0 \\ 0 & 1 & 0 & 0 & T & 0 \\ 0 & 0 & 1 & T & 0 & T^2/2 \\ 0 & 0 & 0 & 1 & 0 & T \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix} \quad (3)$$

The matrix $F_{k,\varphi}^l(\cdot)$ denotes the Constant Turn (CT) model. We choose $\varphi = 1, 2, 3, 4$ with different turning rates $\omega = -1 \text{ rad/s}, -0.05 \text{ rad/s}, 0.05 \text{ rad/s}, 1 \text{ rad/s}$ respectively to describe the motions of lane-changing. $F_{k,5}^i$, the Constant Acceleration (CA) model, describes linear motion with a uniform acceleration and constant speed.

The noisy measurement vector z_k^i , which includes the bearing θ_k^i and range measurements r_k^i of the i th target at time kT , is defined as

$$z_k^i = \begin{bmatrix} \theta_k^i \\ r_k^i \end{bmatrix} = \begin{bmatrix} \arctan \frac{y_k^i - y_{s,k}}{x_k^i - x_{s,k}} \\ \sqrt{(x_k^i - x_{s,k})^2 + (y_k^i - y_{s,k})^2} \end{bmatrix} + \begin{bmatrix} v_{\theta,k}^i \\ v_{r,k}^i \end{bmatrix} \quad (4)$$

where the measurement noise $[v_{\theta,k}^i, v_{r,k}^i]^T$ is a 2×1 zero-mean Gaussian noise vector with covariance matrix R .

3. PROPOSED DS-UKGMPHD FILTER

In the proposed filter, an adaptive time-varying set of submodels is used [9]. Incorporating Diagram Switching approach with IMM-UKGMPHD filter, the procedure of the DS-UKGMPHD filter is as follows:

Step 1: Initialize a diagram set.

Here Φ is chosen to be the total diagram and $\Phi_{(l)}\{\beta_{l-1}, \beta_l, \beta_{l+1}\}$ is the stochastic sub-diagram. l is the model index. Markov chain with transition probability matrix is π_{pq} . $\Phi_{(0)}$ is considered as the default sub-diagram. Here the graphic presentation Φ for automotive radar is as shown in Fig. 1.

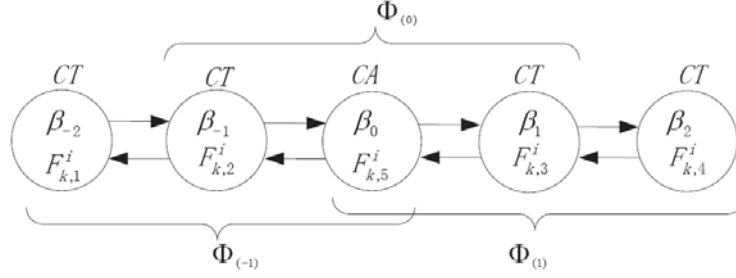


Figure 1. Diagram Φ for targets detected by automotive radar.

Step 2: Set up an effective logic to instruct the transition of models.

Suppose that the sub-graph is $\Phi^{(k-1)}$ at sampling time $k-1$, the decision rule is

$$\Phi^{(k)} = \begin{cases} \Phi_{(l-1)}, & \text{if } \mu_{k-1}^{(l-1)} > \tau_{DS} \\ \Phi_{(l+1)}, & \text{if } \mu_{k-1}^{(l+1)} > \tau_{DS} \\ \Phi_{(l)}, & \text{otherwise} \end{cases} \quad (5)$$

where τ_{DS} is a threshold probability for mode transition, and $\mu_{k-1}^{(l\pm 1)}$ denotes the probability of $\beta^{(l\pm 1)}$ at sampling time $k-1$.

Step 3: Initialization and mixing for certain sub-diagram.

For $k=0$, initiate each state target $\hat{X}_0^q$, the covariance matrix $\hat{P}_0^q$ and model probability $\mu_0^q = 1/M$. M is the number of the models in the model-subset, here we choose $M=3$ as Fig. 1 indicates. The current model index is $q(q=1, \dots, M)$.

(1) For $k=k+1$, $k>0$

$$\mu_{k-1,pq}^{(i)} = \frac{1}{\bar{c}_q} \pi_{pq} \mu_{k-1,p}^{(i)} \quad (6)$$

where

$$\bar{c}_{k-1,q}^{(i)} = \sum_{p=1}^M \pi_{pq} \mu_{k-1,p}^{(i)} \quad (7)$$

$\mu_{k-1,p}^{(i)}$ is the occurrence probability of the i th target using model p . The initial mixed PHD function

$$D_{k-1,q}(x) = \sum_{p=1}^M D_{k-1,p}(x) \mu_{k-1,pq}^{(i)} \quad (8)$$

The mixed weight, state, and covariance matrix are respectively as follows.

$$\omega_{k-1,q}^{(i)} = \sum_{p=1}^M \omega_{k-1,p}^{(i)} \mu_{k-1,pq}^{(i)} \quad (9)$$

$$\hat{X}_{k-1,q}^{(i)} = \sum_{p=1}^M \hat{X}_{k-1,p}^{(i)} \mu_{k-1,pq}^{(i)} \quad (10)$$

$$P_{k-1,q}^{(i)} = \sum_{p=1}^M \mu_{k-1,pq}^{(i)} \left[P_{k-1,p}^{(i)} + \varsigma_{k-1,pq}^{(i)} \left(\varsigma_{k-1,pq}^{(i)} \right)^T \right] \quad (11)$$

where

$$\varsigma_{k-1,pq}^{(i)} = \hat{X}_{k-1,p}^{(i)} - \tilde{X}_{k-1,q}^{(i)} \quad (12)$$

Step 4: Run the UKGMPHD filter for each model.

$\omega_{k-1,q}^{(i)}$, $\tilde{X}_{k-1,q}^{(i)}$ and $P_{k-1,q}^{(i)}$ above-mentioned are inputs of the UKGMPHD filter. The steps include prediction, updating, pruning and merging [12]. Unscented transition is used in prediction and updating steps. The estimation results are $\omega_{k,q}^{(i)}$, $\tilde{X}_{k,q}^{(i)}$ and $P_{k,q}^{(i)}$.

Step 5: Update of the model probabilities.

The likelihood and probability of the i th Gaussian component based on model q at the sampling time k are respectively as follows.

$$\Lambda_{k,q}^{(i)} = N \left(Z_k | q, \tilde{X}_{k-1,q}^{(i)}, \tilde{P}_{k-1,q}^{(i)} \right) \quad (13)$$

$$\mu_{k,q}^{(i)} = \frac{1}{c^{(i)}} \Lambda_{k,q}^{(i)} \sum_{p=1}^M \pi_{pq} \mu_{k-1,p}^{(i)} \quad (14)$$

Step 6: Combined estimation.

The combined PHD function is

$$D_k(x) = \sum_{q=1}^M \sum_{i=1}^{J_k} \omega_{k,q}^{(i)} N \left(x, \tilde{X}_{k,q}^{(i)}, P_{k,q}^{(i)} \right) \quad (15)$$

where J_k is the number of the Gaussian components.

The combined weight, state, and covariance matrix are respectively as follows.

$$\omega_k^{(i)} = \sum_{q=1}^M \omega_{k,q}^{(i)} \mu_{k,q}^{(i)} \quad (16)$$

$$\hat{X}_k^{(i)} = \sum_{q=1}^M \hat{X}_{k,q}^{(i)} \mu_{k,q}^{(i)} \quad (17)$$

$$P_k^{(i)} = \sum_{q=1}^M \mu_{k,q}^{(i)} \left[P_{k,q}^{(i)} + \varsigma(\varsigma)^T \right] \quad (18)$$

where

$$\varsigma_{k,pq}^{(i)} = \hat{X}_k^{(i)} - \tilde{X}_{k,q}^{(i)} \quad (19)$$

The flow diagram for DS-UKGMPHD filter is presented in Fig. 2.

4. SIMULATION AND DISCUSSION

4.1. Simulation Scenario and Parameter Setting

In this section, a Cartesian two-dimensional scenario is presented. Both DS-GMUKPHD filter and IMM-GMUKPHD filter are then used to track these targets for comparison. The sample interval is 0.1s, and the total simulation time is 10s. Assuming that the maximum measurement range of the radar is 120 m, the test scenario is constructed as follows:

- 1) The scenario simulates a cluttered 4-lane dual carriageway [150 m, 150 m]². The host vehicle with radar is located at (40, 0) m and keeps linear motion with a constant speed of 25 m/s all the time. This car constitutes relatively stationary and y positions described in this paper are relative to

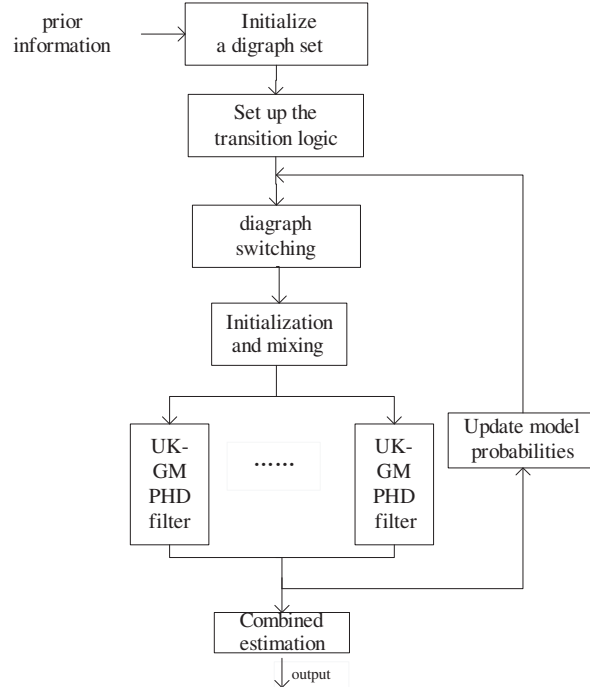


Figure 2. Flow diagram for DS-UKGMPHD filter.

Table 1. Simulation parameters.

Simulation Parameters	parametric meanings	Value
τ_{DS}	threshold for sub-graph transition	0.65
P_s	targets' survival probability	0.95
P_D	targets' detection probability	0.99
τ	pruning threshold	10^{-5}
U_{merge}	merging threshold	4
J_{max}	maximum number of Gaussian components	100
r	Poisson means	4
Q	process noise covariance	$\text{diag}([5, 2, 5, 2, 0.5, 0.5])$
R	measurement noise covariance	$\text{diag}([0.01, 0.01])$

this car. Target 1 keeps linear motion with the initial state $x_0^1 = [62, 0, 120, -0.2, 0, -0.2]^T$ during $[0.1, 1.2]$ s, and keeps linear motion with a uniform acceleration of 0.08 m/s^2 during $[1.3, 4]$ s. After that, it keeps linear motion at a constant speed; Target 2 changes lanes for two times: it turns right with initial state $x_0^2 = [70, -2.8, 106, -2.7, 0, 0]^T$ and a turn-rate of $\omega = -0.1 \text{ rad/s}$ during $[2.1, 3.6]$ s, and then changes back to the lane with a turn-rate of $\omega = -0.04 \text{ rad/s}$. Target 3 has an initial state of $x_0^3 = [22, 0, 3, 1.7, 0, 0.5]^T$ during $[3.1, 4.5]$ s and then keeps linear motion with a uniform acceleration of -0.02 m/s^2 ; target car 4 is detected with initial state $x_0^4 = [18, 0, 3, 2.5, 0, 0]^T$ since 6 s and start to change the lane 0.8 s later. The turning rates are 0.05 rad/s , -0.05 rad/s respectively. During the simulation steps $[9.3, 10]$ s, the car moves with a constant velocity of 27.5 m/s .

- 2) For automotive radar tracking, no spawning is considered. The clutter is modelled as a Poisson RFS with the mean r and uniform density over the measurement space. Five models are used to describe multiple maneuvering cars, as is stated in Section 2. The transition probability matrix of

sub-models is set by $\pi_{pq} = \begin{bmatrix} 0.75 & 0.125 & 0.125 \\ 0.125 & 0.75 & 0.125 \\ 0.125 & 0.125 & 0.75 \end{bmatrix}$, simulation parameters are listed in Table 1.

4.2. Simulation Results and Discussion

Figure 3 shows the true trajectories of four targets detected by automotive radar and the measurements which originate from either targets or clutter. In Fig. 4 and Fig. 5, tracking results based on the DS-UKGMPHD filter and IMM-UKGMPHD filter against the true tracks are shown. The automotive radar is located at the pentagram marker, and each trajectory starts at the circle markers. The individual x and y coordinates of real tracks and estimations for each time step are shown in Figs. 6 and 7. The estimated number of targets based on the two algorithms against true values is plotted in Fig. 8 and the optimal sub-pattern assignment (OSPA) distance ($p = 2, c = 8$) at each time step is illustrated in Fig. 9 for further evaluation.

First, it can be found that the estimated positions based on DS-UKGMPHD filter are close to the true tracks in Fig. 4 and Fig. 6, whereas the estimated positions based on IMM-UKGMPHD filter are comparatively undesirable, which can be illustrated by two obviously incorrect positions at 2.1 s and 7.4 s in Fig. 7. Second, in Fig. 8, the IMM-UKGMPHD filter estimates the target number wrongly

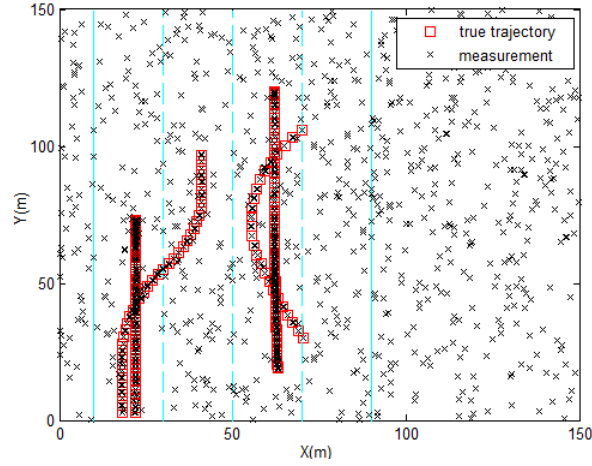


Figure 3. Measurements of the detected cars in the clutter.

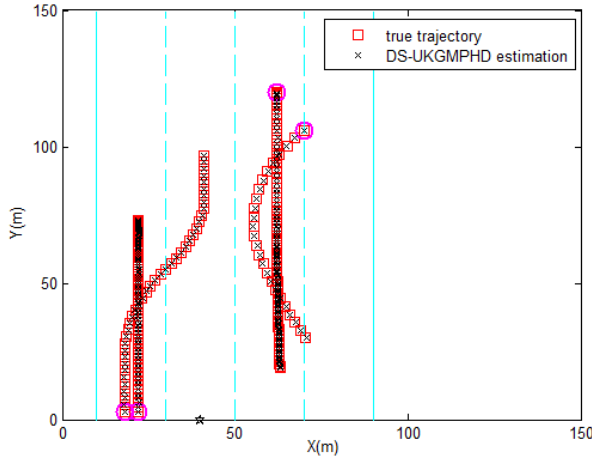


Figure 4. Multi-target tracking for automotive radar using DS-UKGMPHD.

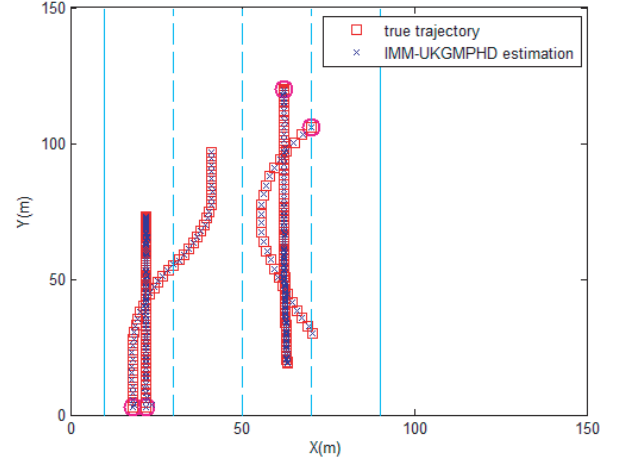


Figure 5. Multi-target tracking for automotive radar using IMM-UKGMPHD.

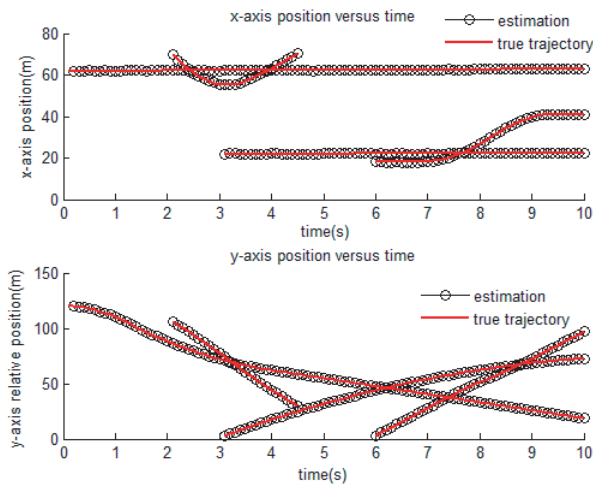


Figure 6. Targets' positions within the measurement time using DS-UKGMPHD.

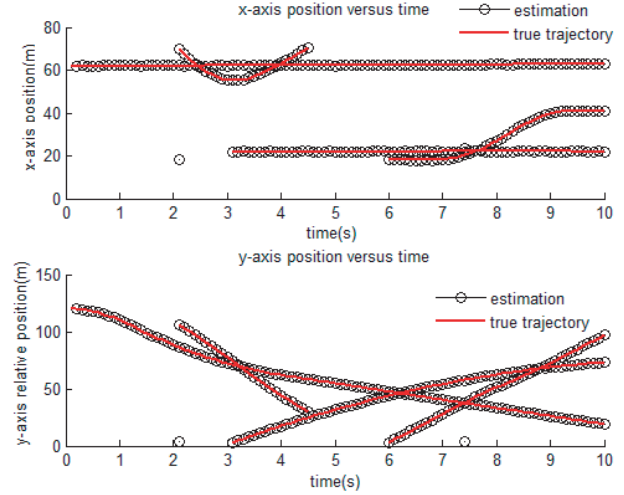


Figure 7. Targets' positions within the measurement time using IMM-UKGMPHD.

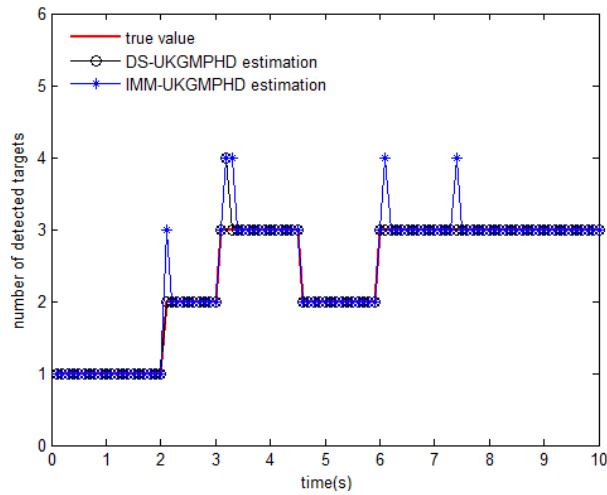


Figure 8. Targets' number estimated by DS-UKGMPHD and IMM-UKGMPHD.

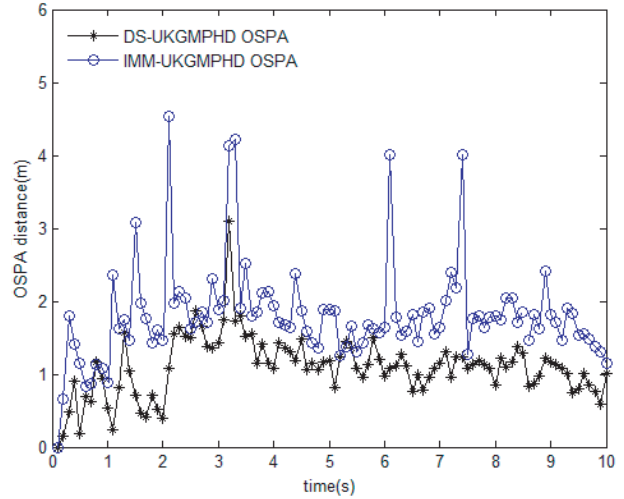


Figure 9. OSPA distance based on DS-UKGMPHD and IMM-UKGMPHD.

for five times (at 2.1 s, 3.2 s, 3.3 s, 6.1 s and 7.4 s), while DS-UKGMPHD filter misestimates for once. Third, Fig. 9 shows that the OSPA values of two filters peak correspondingly at the instances where the estimated number is incorrect. When the estimated number of targets is correct, the OSPA miss-distance of the DS-UKGMPHD filter proves smaller than IMM-UKGMPHD filter.

5. CONCLUSION

In this paper, a new DS-UKGMPHD filter is presented and applied to automotive radar. With the road environment cluttered and measurement equations nonlinear, the proposed filter is capable of tracking maneuvering and time-varying number of targets owing to the use of UK filter and GMPHD filter, as shown in Section 4. What's more, compared with IMM-UKGMPHD filter, the proposed approach uses a switchable subset of a predefined diagram which covers more motions. Performance of DS-UKGMPHD algorithm improves on both estimated number and positions. In the future work, the algorithm validated in MATLAB environment in this paper may be applied to practice.

ACKNOWLEDGMENT

This paper was supported by the National Natural Science Foundation of China (No. 61301213).

REFERENCES

1. Wang, H. and J. Liu, "The analysis of target track of passive radar based on Kalman filter," *Tactical Missile Technology*, 2005.
2. Kim, B., K. Yi, H. J. Yoo, H. J. Chong, and B. Ko, "An IMM/EKF approach for enhanced multi-target state estimation for application to integrated risk management system," *IEEE Transactions on Vehicular Technology*, Vol. 64, No. 3, 1, 2014.
3. Mahler, R. P. S., "Multitarget bayes filtering via first-order multitarget moments," *IEEE Transactions on Aerospace & Electronic Systems*, Vol. 39, No. 4, 1152–1178, 2003.
4. Lundquist, C., L. Hammarstrand, and F. Gustafsson, "Road intensity based mapping using radar measurements with a probability hypothesis density filter," *IEEE Transactions on Signal Processing*, Vol. 59, No. 2, 1397–1408, 2011.
5. Heuer, M., A. Al-Hamadi, A. Rain, and M. M. Meinecke, "Detection and tracking approach using an automotive radar to increase active pedestrian safety," *2014 IEEE Intelligent Vehicles Symposium Proceedings*, 890–893, IEEE, 2014.
6. Hong, S., L. Wang, Z.-G. Shi, and K. S. Chen, "Simplified particle phd filter for multiple-target tracking: Algorithm and architecture," *Progress In Electromagnetics Research*, Vol. 120, 481–498, 2011.
7. Chen, J.-F., Z.-G. Shi, S.-H. Hong, and K. S. Chen, "Grey prediction based particle filter for maneuvering target tracking," *Progress In Electromagnetics Research*, Vol. 93, 237–254, 2009.
8. Georgescu, R. and P. Willett, "The multiple model CPHD tracker," *IEEE Transactions on Signal Processing*, Vol. 60, No. 4, 1741–1751, 2012.
9. Maher, R., "A survey of PHD filter and CPHD filter implementations," *Proceedings of SPIE — The International Society for Optical Engineering*, Vol. 6567, 65670O–65670O-12, 2007.
10. Hao, Y. L., F. B. Meng, F. Sun, and F. Shen, "Application of UK-GMPHDF algorithm based on imm in multiple maneuvering targets tracking," *Systems Engineering — Theory & Practice*, Vol. 31, No. 11, 2225–2233, 2011.
11. Li, X. R. and Y. Bar-Shalom, "Multiple-model estimation with variable structure," *IEEE Transactions on Automatic Control*, Vol. 41, No. 4, 478–493, 1996.
12. Clark, D., B. N. Vo, and J. Bell, "GM-PHD filter multitarget tracking in sonar images," *Defense and Security Symposium*, Vol. 6235, 62350R–62350R-8, International Society for Optics and Photonics, 2006.