

DERIVATIVE CONSTRAINED ROBUST LCMV BEAMFORMING ALGORITHM

R. Li, X. Zhao, and X. W. Shi

National Key Laboratory of Antennas and Microwave Technology
Xidian University
No. 2 South Taibai Road, Xi'an, Shaanxi, China

Abstract—A class of linear derivative constraints, which provides robustness to the conventional narrowband uniform linear array configuration so as to handle broadband and moving jammer sources problem is presented. The robust modification of linear constrained minimum variance (LCMV) algorithm is given to broaden the null widths in the jammer directions. Numerical results show that the proposed algorithm has a better performance in broadband and moving jammer scenarios in terms of maintaining beamwidth broadening and capability of rejecting interferences.

1. INTRODUCTION

Smart antenna technology has found applications in radar, sonar and communication systems for minimizing degradation in signal-to-noise ratio performance owing to unwanted interference [1–9]. One of the important applications of optimum adaptive beamforming is to suppress jammer signals [10, 19]. Usually, the directional pattern nulls formed by beamforming algorithm are extremely sharp. However, in practical communication systems, the high speed jammer motion or broadband signal may bring the jammers out of the nulls.

Recently, a wide number of papers have been devoted to the problem of robust adaptive beamforming algorithm [20]. The limitation of these algorithms is they only consider broadening the beamwidth in the desired signal direction. Derivative constraints are proposed to improve the performance of beamforming algorithm in a broadband element space antenna array processors [21]. The robustness against fast jammer motion is considered in [22], where the robust Hung-Turner (HT) algorithm is proposed. [23] further develop the approach of [22], and incorporate the robustness property into

SMI, LSMI and EP algorithm. In a subsequent paper, the derivative constraints of jammer directions are incorporated with a maximum likelihood characterization of the so-called jammer subspace [24].

The main idea of this paper is to present a new set of constraints for broadening the width of the nulls. For this purpose, the derivative constraints are added to the LCMV beamformer. The simulation results show that the proposed algorithm increases the width of the nulls and performs better than the conventional LCMV algorithms in moving jammer scenarios.

2. DERIVATIVE CONSTRAINTS

We assume the problem for a uniform linear array of M antennas at $d = \lambda/2$ spacing. Here λ is the wavelength. Let L ($L < M$) narrow band jammers impinge into the array from the direction of $\{\theta_{J1}, \theta_{J2}, \dots, \theta_{JL}\}$ while the look direction is θ_s . Let the jammers be uncorrelated with each other as well as with the signal.

Therefore, the n th snapshot of $n \times 1$ received data vector can be represented as:

$$x(n) = A_J J(n) + S_d a(\theta_s) + N(n) \quad (1)$$

$J = [J_1(n), J_2(n), \dots, J_L(n)]^T$ is the jammer signal waveforms, and $A_J = [a(\theta_1), a(\theta_2), \dots, a(\theta_L)]$ is the $M \times L$ matrix array manifold of them. The vector $N(n)$ denotes Gaussian White Noise. As plane waves, $a(\theta_i) = [1, e^{j\varphi_i}, \dots, e^{j(M-1)\varphi_i}]^T$, $i = 1, 2, \dots, L$, and $a(\theta_s) = [1, e^{j\varphi_s}, \dots, e^{j(M-1)\varphi_s}]^T$.

To broaden the width of the nulls, the p th-order derivative of directional pattern $f(\theta)$ respect to $\varphi = \frac{2\pi d}{\lambda} \sin \theta$ at θ_{Ji} ($i = 1, 2, \dots, L$) is set to be zero as follow:

$$\left. \frac{\partial^p f(\theta)}{\partial \varphi^p} \right|_{\theta=\theta_{Ji}} = 0, \quad i = 1, 2, \dots, L; \quad p = 1, 2, \dots, P \quad (2)$$

where $f(\theta) = w^H a(\theta)$, and let w be the adjustable weights defined by $w = [w_1, w_2, \dots, w_M]^T$.

And hence,

$$\frac{\partial f(\theta)}{\partial \varphi} = jw_2^* \varphi e^{j\varphi} + \dots + jw_M^* (M-1) \varphi e^{j(M-1)\varphi} = jw^H B a(\theta) \quad (3)$$

where $B = \text{diag}(0, 1, \dots, M-1)$.

Similarly we have

$$\frac{\partial^p f(\theta)}{\partial \varphi^p} = j^p w^H B^p a(\theta) \quad (4)$$

So Equation (2) becomes

$$w^H B^p A_J = 0 \quad (5)$$

3. ROBUST MODIFICATION OF LINEAR CONSTRAINED MINIMUM VARIANCE BEAMFORMING

In the previous section, the derivative constrained algorithm is discussed. It set the high order derivative of directional pattern in the directions of nulls to be zero to broad the null widths. With the derivative constraints, one can expect a better performance of the algorithm in the broadband and moving jammer scenarios. Below, how to use these constraints in the LCMV algorithm is studied. Besides the original linear constraints of LCMV algorithm, the derivative constraints are added. Moreover, we add enforcement constraints to deepen the null depth. Finally, the derivative data control parameter is discussed in this section.

The weights of an optimum antenna array processor are often obtained by solving a LCMV problem. The objective function is the mean output power (variance), and the constraint space is a set of linear equations that ensure a constant gain in a specified direction known as the look direction. The LCMV optimization results in a set of weights that attenuate all signals except for the look direction signal.

This is expressed mathematically as:

$$\begin{cases} \min & P_{out} = E[w^H R_{xx} w] \\ s.t. & S^H w = 1 \end{cases} \quad (6)$$

where R_{xx} denotes the covariance matrix of $x(n)$, i.e., $R_{xx} = E\{x(n)x^H(n)\}$ where $E\{\}$ denotes expectation. The constraints vector S is a column vector, which is to assure the output desired signal power to be a constant. The optimal weight vector w_{opt} to (6) is given by

$$w_{opt} = (S^T R_{xx}^{-1} S)^{-1} R_{xx}^{-1} S \quad (7)$$

Adding the derivative constraints into the constraint matrix, Equation (6) becomes:

$$\begin{cases} \min P_{out} &= E[w^H R_{xx} w] \\ S^H w &= 1 \\ w^H B^p A_J &= 0 \end{cases} \quad (8)$$

The algorithm with the derivative constraints of directional pattern steer wider nulls in the directions of the jammer signals, but the depth of the nulls is reduced correspondingly.

To overcome the depth decrease, enforcement constraints of the interference signal directions are added. Then the problem becomes:

$$\begin{cases} \min P_{out} &= E[w^H R_{xx} w] \\ S^H w &= 1 \\ w^H B^p A_J &= 0 \\ w^H A_J &= \varepsilon \end{cases} \quad (9)$$

where ε is a small quantity which is discussed in the following paragraph.

Let us discuss the choice of the parameter ε in the robust LCMV methods. The real positive weight ε controls the relative contribution of the “derivative” data. With ε increasing, the contribution of the derivative data decreases. The optimum choice of ε is depend on the practical situation. If ε is small, the enforcement constraints make the antenna pattern severely decline in the jammer direction. But in this situation, the antenna pattern is too sensitive to the direction error. Conversely, when ε is large, the nulls is wide enough, but the depth decreased significantly. As a result, the jammer power is not sufficiently suppressed. Therefore, we should find a value of ε from the compromise between null depth and width of the adapted pattern. In Fig. 1, the null depth and width performance of the derivative constrained LCMV algorithm is presented in terms of ε . It is observed that the null depth decrease with the increase of ε while the null width does the opposite way.

4. NUMERICAL RESULTS

4.1. Directional Patterns

Before testing wideband and moving jammer scenarios, it is useful to consider how the constraints modify the directional pattern of adaptive array. Experiments on system identifications are carried out

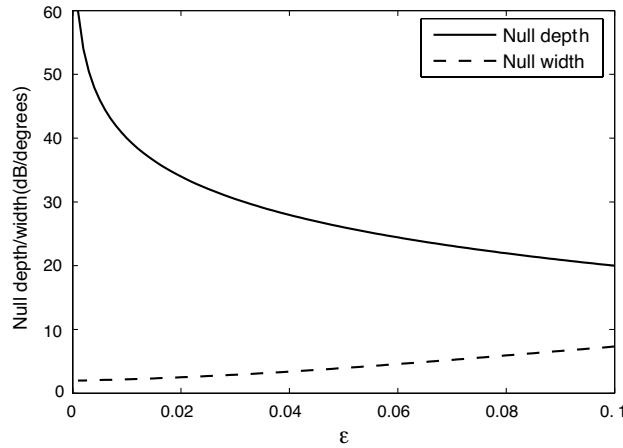


Figure 1. The null depth and the null width versus ϵ .

to evaluate the performance of the proposed derivative constrained LCMV algorithm, referred as LCMV. It is parameterized by the size of the 8-element linear antenna array.

Figure 2 shows the beam pattern of the conventional LCMV algorithm and the robust LCMV algorithm for a desired signal direction at 80° while two narrowband nonmoving jammers impinging from the directions 30° and 140° . We assumed $\text{INR} = 40 \text{ dB}$ for each jammer and $\text{SNR} = 0 \text{ dB}$ in each sensor, respectively. The value of the ϵ is 0.001. The results of computer simulation verify that the derivative constrained LCMV algorithm achieves broader nulls in the jammer directions. The influence of the ϵ on beam pattern is given in Fig. 3. It obviously shows that when the ϵ increases, the null depth decreases fast, but the raise of the null width is not so distinctly.

4.2. Moving Jammers

In this example, we considered the case of two moving jammers. The jammer angular change with the snapshots, the trajectories of which are $\theta_{J1}(i) = 30^\circ + 5 \sin(i/10)$, $\theta_{J2}(i) = 140^\circ - 5 \cos(i/15)$. The value of the ϵ is 0.002. The array element number is 16, and other conditions are the same as that in the last example. Fig. 4 shows the output SINR of the LCMV algorithm and the proposed algorithm for 200 snapshots. Simulation results show that the proposed robust algorithms perform better than conventional algorithms in a moving jammer scenarios. By using the derivative constraints, the output SINR is improved about 4 dB.

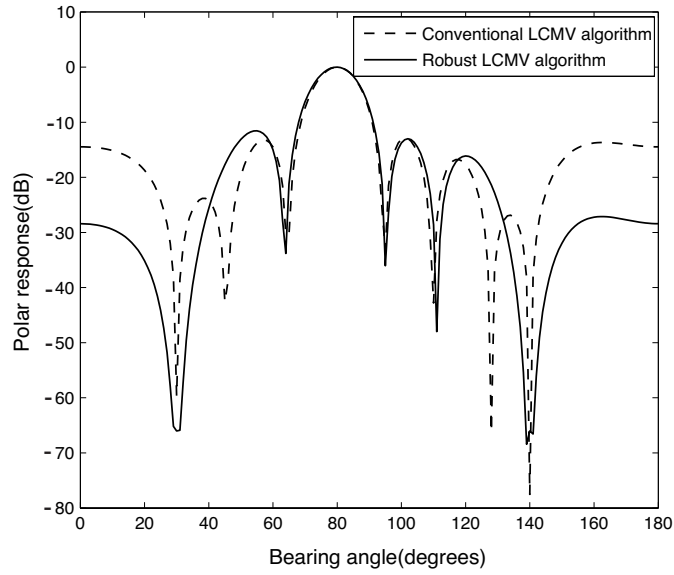


Figure 2. The beam pattern of an 8-element linear array with two nonmoving jammer sources impinging from direction 30° and 140° .

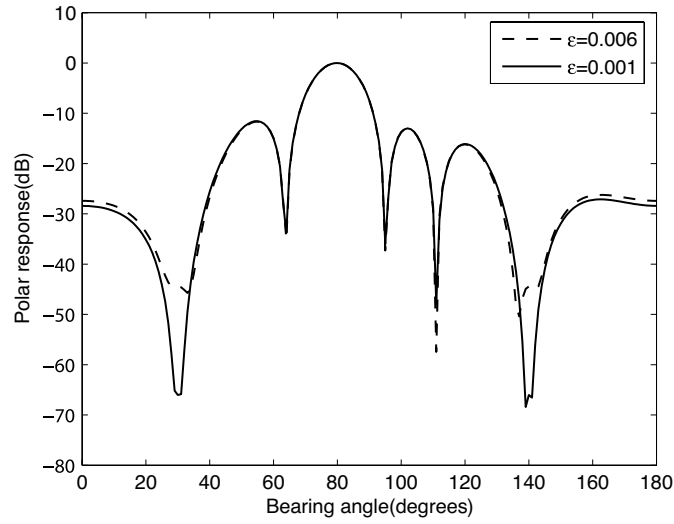


Figure 3. The beam pattern with different ϵ .

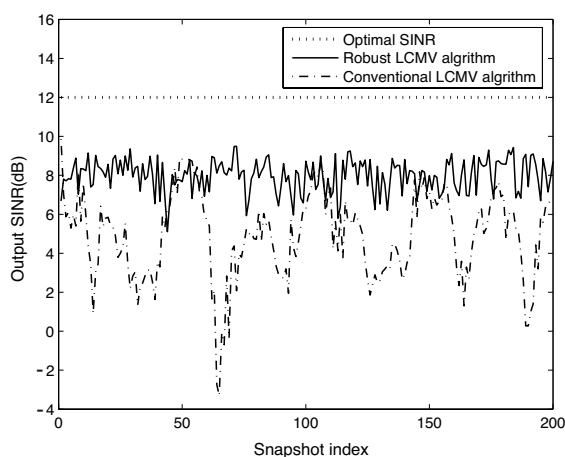


Figure 4. The output SINR of a 16-element linear array with two moving jammer sources.

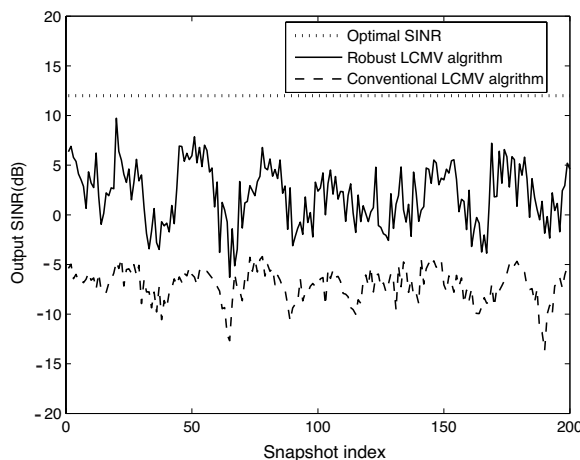


Figure 5. The output SINR of a 16-element linear array with broadband jammer source.

4.3. Broadband Jammers

The single broadband jammer source is considered in the next example. The jammer impinging on the 16-element array from the direction 30° and has the bandwidth 10% as compared with the central frequency. The value of the ϵ is the same as that in the last example. Fig. 5 shows the output SINR of the conventional LCMV algorithm and constrained

LCMV algorithm. It clear from the figure that the conventional LCMV algorithm fails when the jammer is broadband signal while the robust LCMV algorithm retains low losses.

5. CONCLUSIONS

This paper has imposed additional constraints known as the derivative constraints on LCMV algorithm to maintain a broader null of the spatial power response width in the vicinity of interference directions. The optimal weight vector is solved by minimizing the weight vector subject to linear and derivative constraints on the weight vector. Results of computer simulations have demonstrated the effects of introducing derivative constraints to the optimum processor. As a consequence of derivative constraints, the null widths are broadening to alleviate the broadband and moving jammer problem.

ACKNOWLEDGMENT

The author is grateful to the anonymous reviewers for their comments and suggestions that significantly improved the presentation of this paper.

REFERENCES

1. Gao, F., R. H. Shan, and Q. Z. Liu, "A novel circular smart antenna array implementation and its analysis with mutual coupling," *Journal of Electromagnetic Waves and Applications*, Vol. 18, 1671–1678, 2004.
2. Fakoukakis, F. E., S. G. Diamantis, A. P. Orfanides, and G. A. Kyriacou, "Development of an adaptive and a switched beam smart antenna system for wireless communications," *Journal of Electromagnetic Waves and Applications*, Vol. 20, 399–408, 2006.
3. Dessouky, M., H. Sharshar, and Y. Albagory, "A novel tapered beamforming window for uniform concentric circular arrays," *Journal of Electromagnetic Waves and Applications*, Vol. 20, 2077–2089, 2006.
4. Guo, B., Y. Wang, J. Li, P. Stoica, and R. Wu, "Microwave imaging via adaptive beamforming methods for breast cancer detection," *Journal of Electromagnetic Waves and Applications*, Vol. 20, 53–63, 2006.

5. Dessouky, M., H. Sharshar, and Y. Albagory, "Improving the cellular coverage from a high altitude platform by novel tapered beamforming technique," *Journal of Electromagnetic Waves and Applications*, Vol. 21, 1721–1731, 2007.
6. Jeong, Y. S. and J. H. Lee, "Estimation of time delay using conventional beamforming-based algorithm for UWB systems," *Journal of Electromagnetic Waves and Applications*, Vol. 21, 2413–2420, 2007.
7. Mahmoud, K. R., M. El-Adawy, S. M. M. Ibrahim, R. Bansal, K. R. Mahmoud Visiting, and S. H. Zainud-Deen, "Performance of circular Yagi-Uda arrays for beamforming applications using particle swarm optimization algorithm," *Journal of Electromagnetic Waves and Applications*, Vol. 22, 353–364, 2008.
8. Mahmoud, K. R., M. El-Adawy, S. M. M. Ibrahim, R. Bansal, and S. H. Zainud-Deen, "A comparison between circular and hexagonal array geometries for smart antenna systems using particle swarm optimization algorithm," *Progress In Electromagnetics Research*, PIER 72, 75–90, 2007.
9. Gozasht, F., G. Dadashzadeh, and S. Nikmhr, "A comprehensive performance study of circular and hexagonal array geometries in the LMS algorithm for smart antenna applications," *Progress In Electromagnetics Research*, PIER 68, 281–296, 2007.
10. Mouhamadou, M., P. Vaudon, and M. Rammal, "Smart antenna array patterns synthesis: Null steering and multi-user beamforming by phase control," *Progress In Electromagnetics Research*, PIER 60, 95–106, 2006.
11. Mukhopadhyay, M., B. K. Sarkar, and A. Chakrabarty, "Augmentation of anti-jam GPS system using smart antenna with a simple DOA estimation algorithm," *Progress In Electromagnetics Research*, PIER 67, 231–249, 2007.
12. Gu, Y.-J., Z.-G. Shi, K. S. Chen, and Y. Li, "Robust adaptive beamforming for steering vector uncertainties based on equivalent DOAS method," *Progress In Electromagnetics Research*, PIER 79, 277–290, 2008.
13. Gu, Y.-J., Z.-G. Shi, K. S. Chen, and Y. Li, "Robust adaptive beamforming for a class of Gaussian steering vector mismatch," *Progress In Electromagnetics Research*, PIER 81, 315–328, 2008.
14. Sharma, A. and G. Singh, "Design of single pin shorted three-dielectric-layered substrates rectangular patch microstrip antenna for communication systems," *Progress In Electromagnetics Research Letters*, Vol. 2, 157–165, 2008.
15. Azmi, P. and N. Tavakkoli, "Narrow-band interference suppression

- in CDMA spread-spectrum communication systems using pre-processing based techniques in transform-domain,” *Progress In Electromagnetics Research Letters*, Vol. 3, 141–150, 2008.
16. Gao, G. P., X. X. Yang, and J. S. Zhang, “A printed volcano smoke antenna for UWB and WLAN communications,” *Progress In Electromagnetics Research Letters*, Vol. 4, 55–61, 2008.
 17. Sotiriou, A. I., P. T. Trakadas, and C. Capsalis, “Uplink carrier-to-interference improvement in a cellular telecommunication system when a six-beam switched parasitic array is implemented,” *Progress In Electromagnetics Research B*, Vol. 5, 303–321, 2008.
 18. Babayigit, B., K. Guney, and A. Akdagli, “A clonal selection algorithm for array pattern nulling by controlling the positions of selected elements,” *Progress In Electromagnetics Research B*, Vol. 6, 257–266, 2008.
 19. Aldirmaz, S. and L. Durak, “Broadband interference excision in spread spectrum communication systems based on short-time Fourier transformation,” *Progress In Electromagnetics Research B*, Vol. 7, 309–320, 2008.
 20. Gaudes, C. C., I. Santamaria, J. Via, E. M. Gomez, and T. Sese Paules, “Robust array beamforming with sidelobe control using support vector machines,” *IEEE Transactions on Signal Processing*, Vol. 55, 574–584, 2007.
 21. Meng, E. and A. Cantoni, “Derivative constraints for broadband element space antenna array processors,” *IEEE Transactions on Acoustics, Speech, and Signal Processing [see also IEEE Transactions on Signal Processing]*, Vol. 31, 1378–1393, 1983.
 22. Gershman, A. B., G. V. Serebryakov, and J. F. Bohme, “Constrained Hung-Turner adaptive beam-forming algorithm with additional robustness to wideband and moving jammers,” *IEEE Transactions on Antennas and Propagation*, Vol. 44, 361–367, 1996.
 23. Gershman, A. B., U. Nickel, and J. F. Bohme, “Adaptive beam-forming algorithms with robustness against jammer motion,” *IEEE Transactions on Signal Processing [see also IEEE Transactions on Acoustics, Speech, and Signal Processing]*, Vol. 45, 1878–1885, 1997.
 24. Agrawal, M. and S. Prasad, “Robust adaptive beamforming for wide-band, moving, and coherent jammers via uniform linear arrays,” *IEEE Transactions on Antennas and Propagation*, Vol. 47, 1267–1275, 1999.