

A COMPACT UWB BANDPASS FILTER WITH IMPROVED OUT-OF-BAND PERFORMANCE USING MODIFIED COUPLING STRUCTURE

X.-K. Tian and Q.-X. Chu

School of Electronic and Information Engineering
South China University of Technology, Guangzhou 510640, China

Abstract—A compact ultra-wideband (UWB) bandpass filter (BPF) with improved harmonic suppression using a modified coupling structure is presented in this paper. The modified coupling structure is constructed by taper-connecting two folded open stubs to the traditional parallel-coupled lines, which shows an improved characteristic in harmonic suppression. By integrating the proposed coupling and the stepped-impedance stub loaded resonator (SISLR), a UWB BPF is finally built and tested. The simulated and measured results are in good agreement with each other, exhibiting good wideband filtering characteristic and improved out-of-band performance.

1. INTRODUCTION

Since the release of ultra-wideband (UWB: 3.1–10.6 GHz) frequency in 2002 [1], a great effort has been made in the exploration of a variety of UWB BPFs using different approaches [2–19]. In [2], a UWB BPF comprised a composite lowpass-highpass topology was proposed. In [3], pseudo-interdigital structure was developed to construct a UWB BPF. UWB BPFs using multiple-mode resonator (MMR) have been reported in [4–6]. In [7, 8], fractal technologies were used to reduce the sizes of UWB BPFs, another intuitive ideas of constructing UWB BPFs were to use composite right-/left-handed (CRLH) transmission line structures [9, 10]. However, it is still a challenge to design a UWB BPF with good in-band and out-of-band performance at compact size. To eliminate the spurious passband, defected ground structures (DGS) were adopted in [11–13], which suffered from fabricated complication.

Received 25 February 2011, Accepted 30 March 2011, Scheduled 8 April 2011

Corresponding author: Xu-Kun Tian (xukun.tian@mail.scut.edu.cn).

of the SISLR are utilized to make up a UWB passband with other higher order harmonics located at the upper-stopband which may cause spurious passband. An improvement is developed in this work by introducing the modified coupling structure for harmonic suppression. The proposed coupling structure is formed by taper-connecting two folded open stubs to the traditional aperture-back parallel-coupled lines.

As shown in Figs. 2(a) and (b), structural parameters of the traditional aperture-back parallel-coupled lines and the proposed modified coupling structure are all the same except the extra taper-connecting folded open stubs. To investigate the characteristics of the modified coupling structure, simulations have been carried out, as shown in Fig. 3. It can be observed obviously that the coupling efficient at the upper stopband is weakened and spurious passband response of the traditional parallel-coupled lines can be greatly suppressed by the folded open stubs. Moreover, by adjusting the length of the open stubs, spurious passband response can be properly tuned with the desired passband response nearly unchanged.

A UWB BPF can be constructed by integrating the modified coupling structure and the SISLR. Meanwhile, at the higher order harmonics of the SISLR, because of the low coupling efficient provided by the modified coupling structure, harmonics in the unwanted passband can be suppressed effectively. Comparison of simulated frequency responses of the UWB BPFs with traditional aperture-

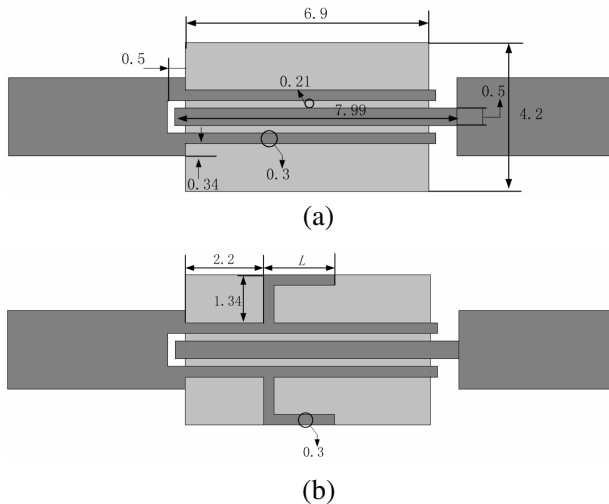


Figure 2. (a) Traditional aperture-back parallel-coupled lines, (b) The modified coupling structure (all in mm).

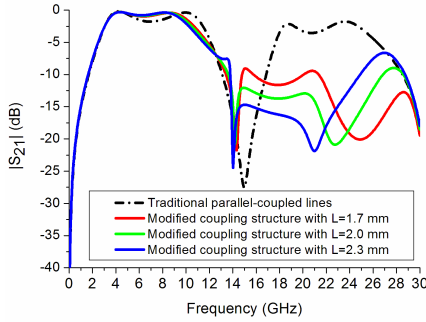


Figure 3. Frequency responses of the traditional parallel-coupled lines and the modified coupling structure.

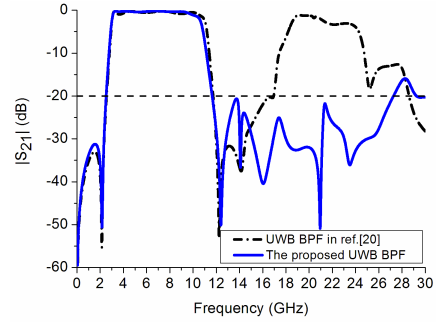


Figure 4. Comparison of the frequency responses of the UWB BPFs with traditional aperture-back parallel-coupled lines and the modified coupling structure.

back parallel-coupled lines [20] and the modified coupling structure is presented in Fig. 4. It is clearly demonstrated that upper-stopband is significantly widened up to 27 GHz with attenuation level of higher than 20 dB in simulation. Moreover, there is little influence on the desired passband response which exhibits very good in-band performance and high selectivity.

3. SIMULATED AND MEASURED RESULTS

To verify the proposed approach, the UWB BPF with harmonic-suppressed coupling structure is optimally designed and fabricated on the substrate with relative dielectric constant of 2.55 and thickness of 0.8 mm. The photographs of the top layer and bottom layer of fabricated UWB BPF are demonstrated in Fig. 5. Experiment has been carried out and Fig. 6 shows the S -parameters and group delay of the UWB BPF. Good agreement between simulation and measurement is obtained. Some slight discrepancies may due to unexpected tolerances in fabrication, material parameters. It can be observed from Fig. 6 that the measured 3-dB passband ranges from 2.8 to 10.4 GHz against the counterpart frequency of 3.0 to 10.7 GHz in simulation. The in-band group delay is flat and small. As expected, the spurious passband has been greatly suppressed due to the modified coupling structure. The measured attenuation level is higher than 20 dB in a wide upper-stopband from 11.5 up to 30 GHz. In addition, the filter has a compact size of 16.4 mm $\times$ 15.65 mm.

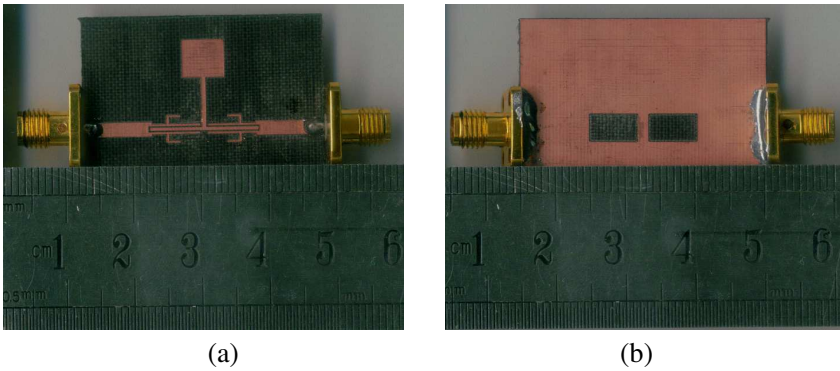


Figure 5. Photographs of the fabricated UWB BPF, (a) top layer, (b) bottom layer.

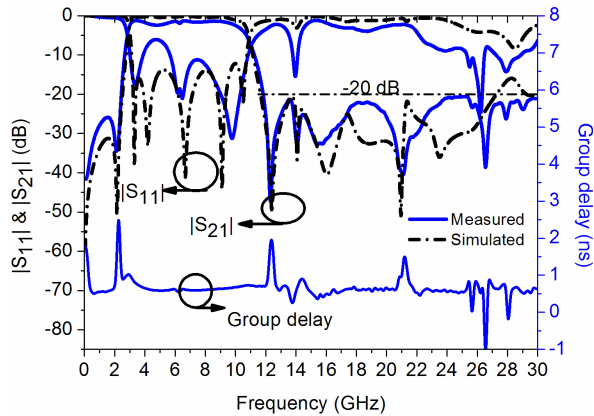


Figure 6. Simulated and measured results of the proposed UWB BPF.

4. CONCLUSION

A compact UWB BPF with improved out-of-band performance using modified coupling structure is presented and implemented in this paper. Both simulated and measured results validate the predicted design with good agreement, demonstrating that the proposed modified coupling structure has an improved characteristic in harmonic suppression and the upper-stopband of the proposed UWB BPF has been significantly widened up to 30 GHz with attenuation level higher than 20 dB.

ACKNOWLEDGMENT

This work is supported by the Science Funds of China (U0635004) and The National Natural Science Foundation of China for the Youth (60801033).

REFERENCES

1. Federal Communications Commission, "Revision of Part 15 of the commission's rules regarding ultra wideband transmission system first report and order," Tech. Rep., ET Docket 98-153, FCC02-48, FCC, Feb. 2002.
2. Hsu, C. L., F. C. Hsu, and J. T. Kuo, "Microstrip bandpass filters for ultra-wideband (UWB) wireless communications," *IEEE MTT-S Int. Symp. Dig.*, 679–682, Jun. 2005.
3. Ji, M. Z. and Q. X. Chu, "A compact UWB bandpass filter using pseudo-interdigital stepped impedance resonators," *Proc. China Microwave Millimeter-wave Conference*, 1096–1098, Ningbo, China, Oct. 2007.
4. Zhu, L., S. Sun, and W. Menzel, "Ultra-wideband (UWB) bandpass filter using multiple-mode resonator," *IEEE Microwave Wireless Components Letters*, Vol. 15, No. 11, 796–798, 2005.
5. Gao, S. S., X. S. Yang, J. P. Wang, et al., "Compact ultra-wideband (UWB) bandpass filter using modified stepped impedance resonator," *Journal of Electromagnetic Waves and Applications*, Vol. 22, No. 4, 541–548, 2008.
6. Chu, Q. X. and X. K. Tian, "Design of UWB bandpass filter using stepped-impedance stub loaded resonator," *IEEE Microwave Wireless Components Letters*, Vol. 20, No. 9, 501–503, 2010.
7. Chen, H. and Y. X. Zhang, "A novel and compact UWB bandpass filter using microstrip fork-form resonator," *Progress In Electromagnetics Research*, Vol. 77, 273–280, 2007.
8. An, J., G.-M. Wang, W. D. Zeng, and L.-X. Ma, "UWB filter using defected ground structure of Von Koch fractal shape slot," *Progress In Electromagnetics Research Letters*, Vol. 6, 61–66, 2009.
9. Gong, J. Q. and Q. X. Chu, "SCRLH TL based UWB bandpass filter with widened upper stopband," *Journal of Electromagnetic Waves and Applications*, Vol. 22, No. 14–15, 1985–1992, 2008.
10. Huang, J. Q. and Q. X. Chu, "Compact UWB band-pass filter utilizing modified composite right/left-handed structure with cross coupling," *Progress In Electromagnetics Research*, Vol. 107, 179–186, 2010.

11. Gao, S. S., S. Q. Xiao, J. P. Wang, X. S. Yang, Y. X. Wang, and B. X. Wang, "Compact UWB bandpass filter with wide stopband," *Journal of Electromagnetic Waves and Applications*, Vol. 22, No. 8–9, 1043–1049, 2008.
12. Wei, F., P. Chen, L. Chen, and X. W. Shi, "Design of a compact UWB bandpass filter with defected ground structure," *Journal of Electromagnetic Waves and Applications*, Vol. 22, No. 13, 1783–1790, 2008.
13. Lee, J. K. and Y. S. Kim, "Ultra-wideband bandpass filter with improved using defected ground structure," *IEEE Microwave Wireless Components Letters*, Vol. 20, No. 6, 316–318, 2010.
14. Wong, S. W. and L. Zhu, "EBG-embedded multiple-mode resonator for UWB bandpass filter with improved upper-stopband performance," *IEEE Microwave Wireless Components Letters*, Vol. 17, No. 6, 421–423, 2007.
15. Li, R. and L. Zhu, "Compact UWB bandpass filter using stub-loaded multiple-mode resonator," *IEEE Microwave. Wireless Components Letters*, Vol. 17, No. 1, 40–42, 2007.
16. Chu, Q. X. and S. T. Li, "Compact UWB bandpass filter with improved upper-stopband performance," *Electronics Letters*, Vol. 44, No. 12, 742–743, 2008.
17. Lim, T. B., S. Sun, and L. Zhu, "Compact ultra-wideband bandpass filter using harmonic-suppressed multiple-mode resonator," *Electronics Letters*, Vol. 43, No. 22, 1205–1206, 2007.
18. Yao, B. Y., Y. G. Zhou, Q. S. Cao, et al., "Compact UWB bandpass filter with improved upper-stopband performance," *IEEE Microwave Wireless Components Letters*, Vol. 19, No. 1, 27–29, 2009.
19. Sun, S. and L. Zhu, "Capacitive-ended interdigital coupled lines for UWB bandpass filters with improved out-of-band performances," *IEEE Microwave Wireless Components Letters*, Vol. 16, No. 8, 440–442, 2006.
20. Chu, Q. X. and X. K. Tian, "Design of UWB bandpass filter with notched band," *Proc. Asia-Pacific Microwave Conference*, 37–40, 2010.