

## A COMPACT MICROSTRIP RAT-RACE COUPLER WITH MODIFIED LANGE AND T-SHAPED ARMS

G.-Q. Liu and L.-S. Wu

Key Lab of Ministry of Education for Research of Design and EMC  
of High Speed Electronic Systems  
Shanghai Jiao Tong University, Shanghai, China

W.-Y. Yin<sup>†</sup>

Center for Optics and EM Research, State Key Lab of MOI  
Zhejiang University, Hangzhou, China

**Abstract**—A compact microstrip rat-race coupler is proposed with a new phase inverter which is realized by a modified Lange coupling structure with a slotted ground plane and a floating-potential conductor. Based on the even- and odd-mode theory, its parameters are generally synthesized. In order to further miniaturize the rat-race coupler, a T-shaped line is utilized. A prototype operating at 2.0 GHz is designed and fabricated for verification. The circumference of our proposed rat-race coupler is only  $0.52\lambda$ . Its in-phase and out-of-phase bandwidths are also enhanced, with reasonable agreement obtained between its simulated and measured  $S$ -parameters.

### 1. INTRODUCTION

With the rapid development of modern mobile and wireless communication systems, passive microwave devices, such as filters [1], antennas [2], power dividers [3, 4] and couplers [5, 6], with high performance are being required in large quantities. Rat-race coupler, also referred as hybrid ring coupler, is one type of key passive components for various microwave applications, such as mixers, power amplifiers, phase shifters and antenna feeding networks. This is

---

*Received 20 March 2011, Accepted 14 April 2011, Scheduled 15 April 2011*

Corresponding author: Lin-Sheng Wu (wallish@sjtu.edu.cn).

<sup>†</sup> Also with Key Lab of Ministry of Education for Research of Design and EMC of High Speed Electronic Systems, Shanghai Jiao Tong University, Shanghai, China.

because of its good isolation between two inputs as well as the flat phase difference response between two outputs. The conventional rat-race coupler is composed of one  $3\lambda/4$  and three  $\lambda/4$  arms, where  $\lambda$  is the guided wavelength at its central frequency, and its total circumference is  $1.5\lambda$ . Such a coupler often has a large size and a narrow bandwidth [7], while modern communication systems require a large number of rat-race couplers with compactness and wideband high performance.

In order to reduce its size and enhance the bandwidth effectively, a phase inverter of  $\lambda/4$  long is usually introduced into a rat-race coupler instead of the  $3\lambda/4$  arm. In [8], a  $\lambda/4$  arm has been proposed with an additional phase reversal realized by short-ended parallel coupled lines, leading to tight coupling needed between the parallel lines. However, such tightly coupled lines are very difficult to be implemented with conventional microstrip structures. For the purpose of miniaturization, a new microstrip rat-race coupler is developed by incorporating a microstrip-to-coplanar waveguide (CPW) broadside-coupled structure into the circuit [9], which can provide a strong coupling with a phase reversal. In [10], a phase inverter is realized using a transition between microstrip and CPW on the ground, and it is used to construct a compact rat-race hybrid ring. A phase reversal swap, based on double-sided parallel-strip line (DSPSL), is utilized to save about half the area of conventional rat-race coupler [11], which provides a  $180^\circ$  phase shift and introduces small insertion loss within a wide frequency range.

In a rat-race coupler, the  $3\lambda/4$  arm can also be replaced by a  $\lambda/4$  left-handed arm for the same purpose [12]. However, left-handed transmission lines are usually realized by a periodical structure with complicated configuration and narrow band. So, the performance of left-handed rat-race coupler is not superior to the coupled-line rat-race one [13].

On the other hand, there are many useful methods for area reduction in the development of rat-race couplers, such as multi-folded tracing [14], stepped-impedance [15] and slow-wave structures [16, 17]. The combination of high-impedance transmission lines and shunted lumped capacitors is proposed in [18]. In [19], stepped-impedance stub loading technique is introduced into the design of branch-line and rat-race couplers, which shows the advantages of compactness and dual bands, etc.

In fact, it is not necessary to make three of the four arms in a rat-race coupler have the same impedance and the same length of  $\lambda/4$ . Some rat-race couplers with  $5\lambda/4$ ,  $7\lambda/6$  and even  $19\lambda/18$  circumferences are designed [20, 21]. Generalized synthesis of the rat-race coupler, with its two opposite arms having identical characteristic


impedances, is proposed in [22]. The derived solutions show that the circuit circumference can be further reduced even shorter than a single wavelength. Using the stepped-impedance technique, a rat-race coupler with its circumference of  $0.54\lambda$  is developed, which is much compact.

In this paper, based on the previous studies on rat-race couplers, we at first propose a set of generalized equations for their design with an ideal phase inverter according to the even- and odd-mode theory. Then, the phase reversal, with the arm length shorter than  $\lambda/4$ , is realized by short-ended coupled lines, and the equations given in [8] are extended to a more generalized case. A modified microstrip Lange coupling structure, with a slotted ground plane and a floating-potential conductor, is proposed to meet the specification. A T-shaped line is utilized to further shrink the overall component size. In order to validate our idea, a microstrip rat-race coupler prototype operating at 2.0 GHz is designed and measured. Its circumference is about  $0.52\lambda$ , which shows its size reduction efficiently. At the same time, its bandwidth is also enhanced, with reasonable agreement obtained between its measured and simulated  $S$ -parameters.


## 2. ANALYSIS AND DESIGN

### 2.1. Design Equations of the Rat-race Coupler with a Phase Inverter

Figure 1 shows the layout of a rat-race coupler, where the third arm is separated by an ideal phase inverter with frequency-independent  $180^\circ$  phase shifting. The parameters  $\theta_i$  and  $Y_i$  ( $i = 1, 2$  and  $3$ ) denote the electrical lengths and the normalized characteristic admittances of corresponding arms in the rat-race coupler, respectively.

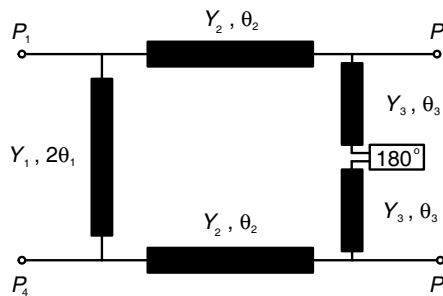

**Figure 1.** Schematic of the rat-race coupler.

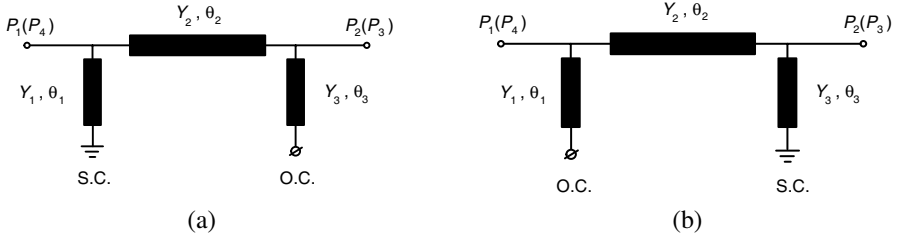

**Figure 2.** Equivalent circuits of the rat-race coupler for (a) even- and (b) odd-modes.

The even- and odd-mode equivalent circuits of the rat-race coupler are shown in Figures 2(a) and 2(b), respectively. According to [7] and [22], both reflection and transmission coefficients for even- and odd-modes can be derived. Then, the  $S$ -parameters of the rat-race coupler are easily calculated. By using the conditions of perfect matching, perfect isolation, in-phase and out-of-phase responses [22], its design equations can be derived as

$$Y_3 = Y_1 \quad (1)$$

$$\theta_3 = \theta_1 \quad (2)$$

$$\sin \theta_2 = R \sin 2\theta_1 \quad (3)$$


$$1/Y_1 = \sqrt{1 + R^2 - 2R \cot 2\theta_1 \cot \theta_2} \quad (4)$$

where  $R = Y_2/Y_1$ ,  $\theta_1 \leq 45^\circ$  and  $\theta_2 \leq 90^\circ$ . Obviously, the two arms on opposite sides should have identical characteristic impedances and identical electrical lengths. These equations are directly used for miniaturizing the rat-race coupler, and the area reduction factor depends on the impedance ratio  $R$  and electrical length  $\theta_1$  adopted in the design.


## 2.2. Phase Reversal Implemented with Short Coupled Lines

Short-ended coupled lines with their electrical length of  $\lambda/4$  can be used to realize an additional phase reversal [8], as shown in Figure 3. In order to provide an additional phase reversal by the coupled lines with an arbitrary electrical length, the design equations presented in [8] should be extended.

A pair of short-ended coupled lines with their electrical lengths of  $\theta$  is equivalent to a transmission line with its electrical length of  $180^\circ + \theta$ , which is a good candidate to build up a phase inverter. Assume that  $\theta_e = \theta_o = \theta$ , where  $\theta_e$  and  $\theta_o$  are the electrical lengths of

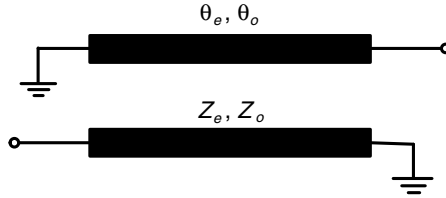

**Figure 3.** Schematic of two coupled lines with their opposite ends short-circuited.

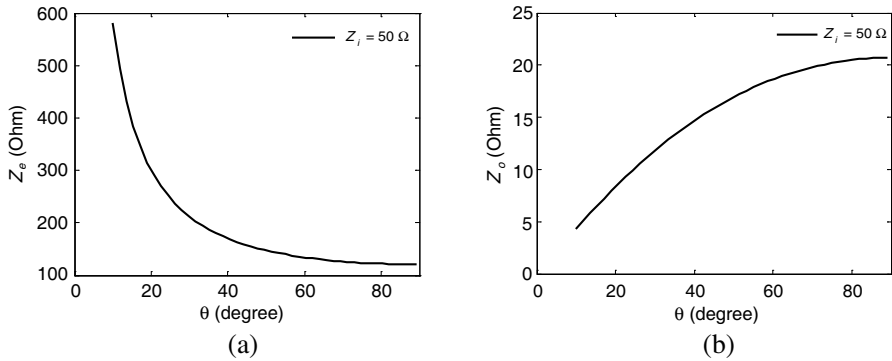

**Figure 4.** (a)  $Z_e$  and (b)  $Z_o$  as functions of  $\theta$  with  $Z_i = 50 \Omega$ .

even- and odd-modes, respectively. Then, the equivalent characteristic impedance of the coupled section is given by [8]

$$Z_i = \frac{2Z_e Z_o \sin \theta}{\sqrt{(Z_e - Z_o)^2 - (Z_e + Z_o)^2 \cos^2 \theta}} \quad (5)$$

where  $Z_e$  and  $Z_o$  are the even- and odd-mode impedances, respectively, and we also have

$$Z_i = \sqrt{Z_e Z_o} \quad (6)$$

Then, the following equations are derived, i.e.,

$$Z_e = Z_i \left( \sqrt{1 + \csc^2 \theta} + \csc \theta \right) \quad (7)$$

$$Z_o = Z_i \left( \sqrt{1 + \csc^2 \theta} - \csc \theta \right) \quad (8)$$

When  $\theta = 90^\circ$ , both  $Z_e = Z_i(\sqrt{2}+1)$  and  $Z_o = Z_i(\sqrt{2}-1)$  are identical to those given in [8].

As  $Z_i = 50 \Omega$ ,  $Z_e$  and  $Z_o$  against  $\theta$  are plotted in Figures 4(a) and 4(b), respectively. It is found that  $Z_e$  decreases and  $Z_o$  increases

with  $\theta$  increased from  $0^\circ$  to  $90^\circ$ . Note that  $Z_e$  is quite high while  $Z_o$  is quite low when the value of  $\theta$  is small. In other words, as we want to implement the design values obtained from (7) and (8), very tight coupling and low odd-mode impedance should be realized in those cases.

Considering the short-ended coupled lines together with the rat-race coupler, we set  $Z_i = Y_1^{-1}$  and  $\theta = 2\theta_1$ . Based on (1)–(4), (7) and (8),  $Z_e$  and  $Z_o$  versus  $\theta_1$  for different values of  $R$  can be calculated when the port impedance  $Z_{port}$  is  $50\ \Omega$ , which are plotted in Figures 5(a) and 5(b), respectively. For a given  $R$ , both  $Z_e$  and  $Z_o$  increase with increasing  $\theta_1$ . When  $R > 1$ , the calculated even-mode impedance  $Z_e$  will be very high with small  $\theta_1$  given, and at the same time, both  $Z_e$  and  $Z_o$  change quickly with  $\theta_1$ . From these design curves, it can be found that  $R \leq 1$  is a good choice to design the rat-race coupler using the above method. The variations of  $Z_e$  and  $Z_o$  are shown in Figure 5(c) for  $R = 0.94$ .

### 2.3. Modified Lange Coupling Structure

Parallel coupled lines are widely used for building various passive components [23–25] because of their simple configurations and easy fabrication. However, for edge-coupled microstrip lines, it is difficult to get such low odd-mode impedance as shown in Figure 5(b). On the other hand, conventional coupled microstrip lines have the inherent nature of weak coupling. Thus, four-line parallel-coupled microstrip lines are introduced into the design of typical Lange couplers, and their equivalent even- and odd-mode impedances, denoted by  $Z_{e4}$  and  $Z_{o4}$ , are approximated by [26]


$$Z_{e4} = \frac{Z_{0o} + Z_{0e}}{3Z_{0o} + Z_{0e}} Z_{0e} \quad (9)$$

$$Z_{o4} = \frac{Z_{0o} + Z_{0e}}{3Z_{0e} + Z_{0o}} Z_{0o} \quad (10)$$


where  $Z_{0e}$  and  $Z_{0o}$  are the even- and odd-mode impedances of a two-conductor pair, respectively.

To further enhance the coupling, some modifications are introduced into the design of Lange structure. In [27], a large aperture is etched under the Lange coupled lines. In [28], a floating-potential conductor is adopted for filter design, together with a slotted ground plane to strengthen the coupling between two-conductor coupled microstrip lines. The floating-potential conductor can also be migrated into the realization of Lange coupling structure, with our proposed modified structure shown in Figure 6. It consists of a set of four-line

parallel-coupled microstrip lines, a slotted ground plane and a floating-potential conductor. The four coupled lines have identical widths, and they are short-circuited through four metallic via holes. In Figure 6(b),

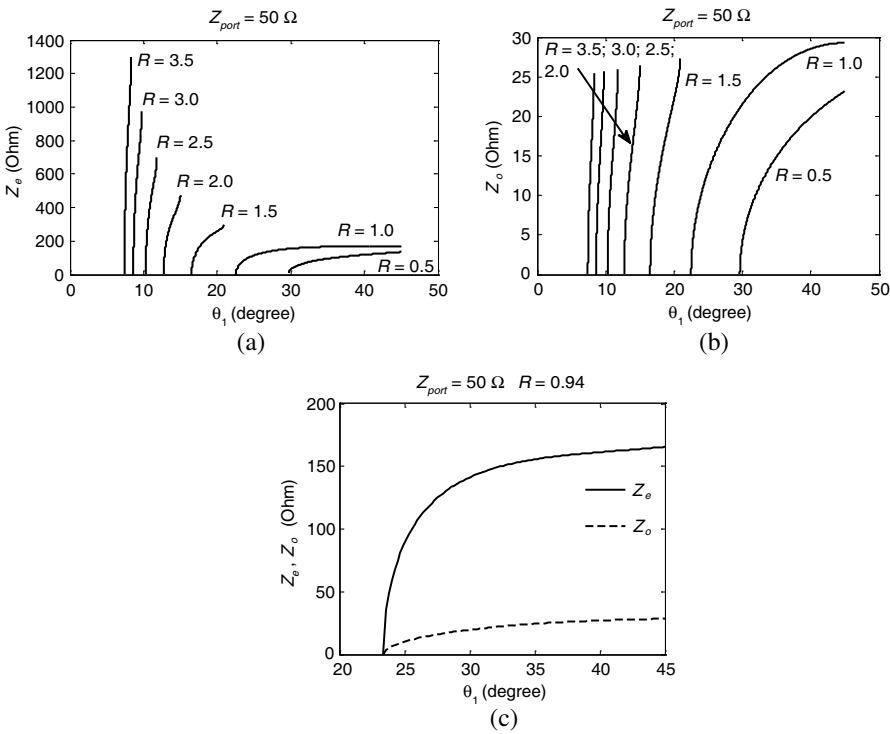

**Figure 5.** (a)  $Z_e$  and (b)  $Z_o$  as functions of  $\theta_1$  for different values of  $R$ , (c)  $Z_e$  and  $Z_o$  as functions of  $\theta_1$  for  $R = 0.94$ .

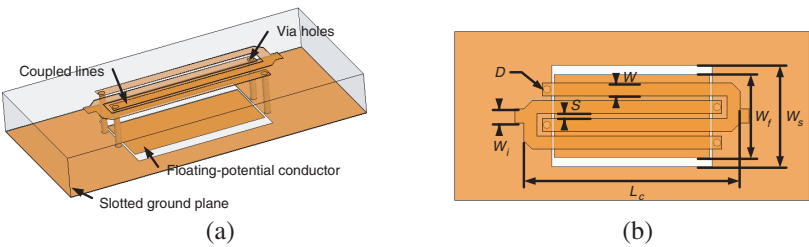

**Figure 6.** Configuration of the proposed modified Lange coupling structure. (a) 3-D and (b) top views.


$W_i$  is the width of coupled lines whose characteristic impedance is designed to be  $Y_1^{-1}$ .  $L_c$ ,  $S$  and  $W_s$  are their length, spacing and width, respectively.  $W_f$  is the width of the floating-potential conductor, and  $D$  is the diameter of via holes. In our design, the gap between the floating-potential conductor and the slotted ground plane has a width of 0.2 mm.

As the slotted ground plane is introduced below the coupled lines, both even- and odd-mode impedances increase simultaneously. However, the even-mode impedance increases much faster than the odd-mode one. Meanwhile, the floating-potential conductor placed under the coupled lines also helps to reduce the odd-mode impedance. Thus, the provided coupling can be enhanced effectively. It is evident that the design of slotted ground and floating-potential conductor is important since both  $Z_e$  and  $Z_o$  are mainly determined by their dimensions. As  $Z_e$ ,  $Z_o$  and a specific substrate are given, the design parameters of the modified Lange section can be obtained by using a full-wave EM simulator, such as Ansoft HFSS.

It should be pointed out that the total length of signal-path through the coupling structure with electrical length  $\theta$  is not equal but close to  $180^\circ + \theta$  in practice. However, the equivalent electrical length can be easily compensated to  $180^\circ + \theta$  by adding two short extra sections with the characteristic impedances of  $Z_i$  to the Lange coupling structure.

## 2.4. T-Shaped Line Section

In order to further miniaturize the structure, a T-shaped line section is used to replace the conventional transmission lines in the rat-race coupler [29]. A shunted stub is tapped to the center of the uniform section, as shown in Figure 7, where  $Z_T$ ,  $\theta_T$ ,  $Z_a$ ,  $\theta_a$ ,  $Z_b$  and  $\theta_b$  represent the characteristic impedances and electrical lengths of the uniform section, the series and shunted sections. Using the even- and odd-mode theory, the design equations of T-shaped line section are derived

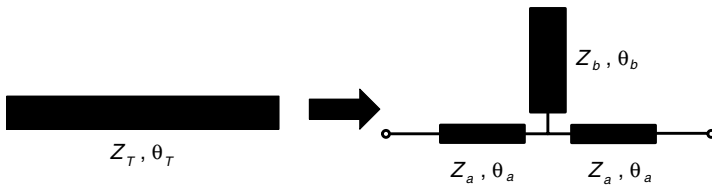

**Figure 7.** Substitution of a uniform section by a T-shaped line.



as

$$y_1 = -\frac{\tan \theta_T}{2} \left( \frac{R_T \tan \theta_b + \tan \theta_a}{1 - R_T \tan \theta_b \tan \theta_a} - \frac{1}{\tan \theta_a} \right) = \frac{Z_a}{Z_T} \quad (11)$$


$$y_2 = \frac{\sin \theta_T}{2} \left( \frac{R_T \tan \theta_b + \tan \theta_a}{1 - R_T \tan \theta_b \tan \theta_a} + \frac{1}{\tan \theta_a} \right) = \frac{Z_a}{Z_T} \quad (12)$$

where  $R_T = Z_a/(2Z_b)$ . For the given  $Z_T$  and  $\theta_T$ , when  $R_T$  and  $\theta_a$  are determined, the values of  $\theta_b$  and  $y_1$  can be obtained according to (11) and (12). Then, we have  $Z_a = y_1 Z_T$  and  $Z_b = Z_a/(2R_T)$ .

### 3. RESULTS AND DISCUSSION

In order to validate our method, a microstrip rat-race coupler operating at 2.0 GHz is designed on a F4B-2 substrate, with its relative permittivity of  $\varepsilon_r = 2.65$ , a loss tangent of 0.003, and a thickness of 0.5 mm. As shown in Figure 8, the  $Y_1$ -arm is a conventional microstrip line; the  $Y_3$ -arm with a phase inverter is realized using the modified Lange coupling structure; and the two opposite  $Y_2$ -arms are substituted by T-shape lines for further miniaturization.


Based on (1)–(4), (7) and (8), the design parameters are obtained with  $R = 0.94$ ,  $\theta_1 = \theta_3 = 30^\circ$ ,  $Y_1^{-1} = 52.66 \Omega$ ,  $\theta_2 = 54.5^\circ$ ,  $Y_2^{-1} = 56.02 \Omega$ ,  $Z_e = 141.25 \Omega$  and  $Z_o = 19.63 \Omega$ . Some critical parameters of the modified Lange arm of the miniaturized rat-race coupler are listed in Table 1. The dimensions of T-shaped arms

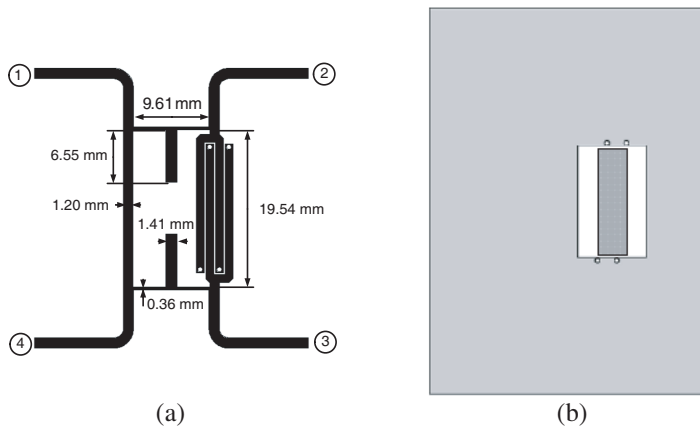

**Figure 8.** Configuration of the proposed rat-race coupler. (a) Top and (b) bottom views.

**Table 1.** Critical dimensions of the modified Lange coupling section.

Parameter	$W_i$	$L_c$	$W$	$S$	$D$	$W_s$	$W_f$
Unit: mm	1.20	18.44	1.00	0.20	0.60	8.43	3.62

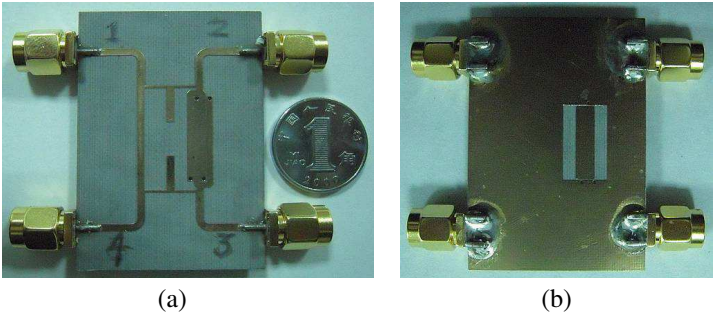


**Figure 9.** Photo of the rat-race coupler prototype. (a) Top and (b) bottom views.

are further determined by (11) and (12). In above case,  $R_T = 1.0$ ,  $Z_a = 94.36 \Omega$ ,  $\theta_a = 17^\circ$ ,  $Z_b = 47.18 \Omega$ , and  $\theta_b = 23.9^\circ$ . In other words, the electrical length of  $Y_2$ -section is reduced by  $20.5^\circ$ . According to our theoretical derivation, it can be found that the total circumference of the microstrip rat-race coupler is only  $0.52\lambda$  at  $f_0 = 2.0$  GHz. So, the size of our realized rat-race coupler has been reduced greatly.

Figure 9 shows the photo of the fabricated prototype. Its size without the four ports is  $20.3 \times 15.6 \text{ mm}^2$ , while a conventional microstrip rat-race coupler with the same operating frequency and substrate occupies an area of about  $1936.6 \text{ mm}^2$ . The  $S$ -parameters of the prototype are measured by an Agilent 8722ES vector network analyzer, and they are plotted in Figure 10 together with the simulated ones. It is observed that reasonable agreement is obtained between them.

The in-phase and out-of-phase magnitude responses of the rat-race prototype are given in Figures 10(a) and 10(b), respectively. At the central frequency  $f_0 = 2.0$  GHz, the measured  $|S_{21}|$ ,  $|S_{41}|$  (in-phase outputs) and  $|S_{11}|$  (reflection) are  $-3.15$ ,  $-3.85$  and  $-15.39$  dB, respectively. The measured  $|S_{23}|$ ,  $|S_{43}|$  (out-of-phase outputs) and  $|S_{33}|$  (reflection) are  $-3.96$ ,  $-3.29$  and  $-15.83$  dB, respectively. And the isolation between Ports 1 and 3 is 29.07 dB at 2.0 GHz. Figure 10(c) shows the phase difference responses of the proposed coupler. At

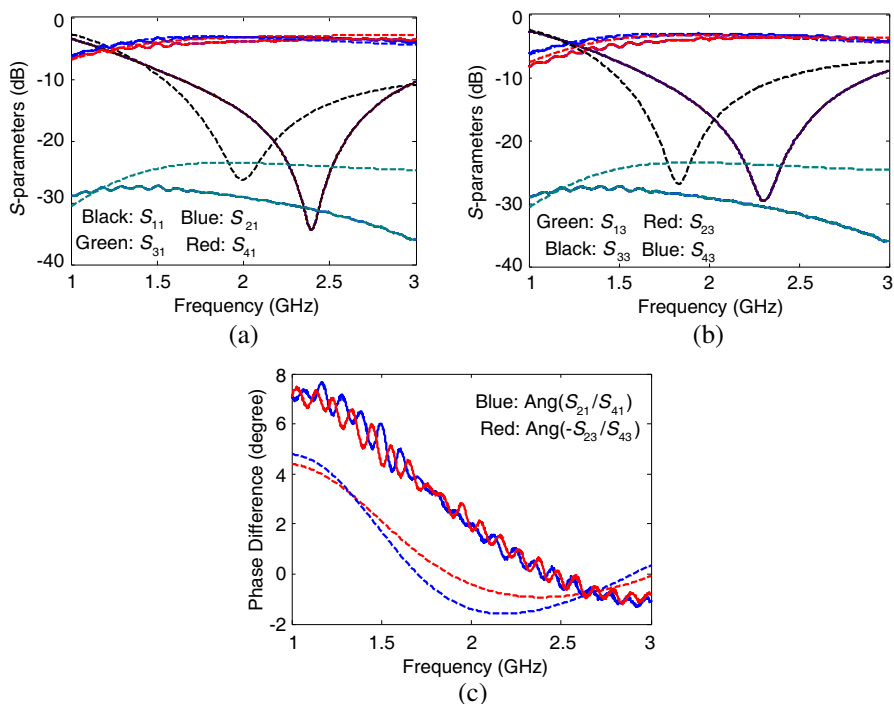

**Figure 10.** Measured and simulated frequency responses of the rat-race coupler prototype, where solid and dashed lines represent measured and simulated results, respectively. (a) In-phase and (b) out-of-phase magnitude responses. (c) Phase differences.

$f_0 = 2.0$  GHz, the phase difference between  $S_{21}$  and  $S_{41}$  ( $\angle S_{21} - \angle S_{41}$ ) is  $2.0^\circ$ , while the corresponding phase difference between  $S_{23}$  and  $S_{43}$  ( $\angle S_{23} - \angle S_{43}$ ) is  $181.8^\circ$ . In comparison with the simulated  $S$ -parameters, we would like to point out that the measured performance is slightly degenerated by not only the permittivity deviation of substrate but also the fabrication tolerance, in particular of the modified Lange coupling structure.

The measured reflection zeros of  $S_{11}$  and  $S_{33}$  are located at 2.42 and 2.31 GHz, respectively, with the frequency shift between the measured and simulated ones observed. At 2.41 GHz, the measured results are  $|S_{21}| = -3.27$  dB,  $|S_{41}| = -3.55$  dB,  $|S_{11}| = -33.79$  dB,  $|S_{23}| = -3.24$  dB,  $|S_{43}| = -3.55$  dB,  $|S_{33}| = -23.55$  dB,  $|S_{31}| = -31.12$  dB,  $\angle S_{21} - \angle S_{41} = 0.1^\circ$ , and  $\angle S_{23} - \angle S_{43} = 180.0^\circ$ , which shows a better performance than the measured results at 2.0 GHz.

Furthermore, the measured fractional bandwidths with  $|S_{11}| \leq$

$-15$  dB and  $|S_{33}| \leq -15$  dB are 31.7% and 27.1%, respectively, while the  $0.54\lambda$  rat-race coupler in [22] can only provide a small fractional bandwidth of 4.6%.

On the other hand, the circumference of our realized rat-race coupler is about  $1/3$  of that of the conventional one, with good isolation between two input ports achieved. Also, good phase difference responses are observed over a wide frequency range. Its frequency responses are much flatter than those of other counterparts, together with a wide reflection bandwidth obtained. These characteristics are demonstrated by the simulated as well as measured  $S$ -parameters of the fabricated prototype as shown above.

#### 4. CONCLUSION

In this paper, a compact microstrip rat-race coupler is proposed and realized by using standard PCB technology. At first, some design equations for the rat-race coupler with an ideal phase inverter are derived using the even- and odd-mode theory. Then, the phase inverter is implemented by a pair of short-ended coupled lines, whose electrical length is not restricted to  $90^\circ$ . According to our deduced equations, a modified Lange coupling structure is presented to get tight coupling and low odd-mode impedance for the phase inverter, including four-line parallel-coupled microstrip lines, a slotted ground plane and a floating-potential conductor. In order to further reduce the coupler size, two opposite arms are built up by a set of T-shaped lines. Finally, a prototype of the microstrip rat-race coupler is designed at 2.0 GHz and fabricated so as to validate our method. The circumference of our developed rat-race coupler is only  $0.52\lambda$ , and it offers a good isolation and a wide operating bandwidth.

#### ACKNOWLEDGMENT

This work was supported by the National Basic Research Program of China under Grant of 2009CB320204, by the National Natural Science Foundation of China under Grant of 60821062, and by the National Natural Science Foundation of China under Grant of 61001014.

#### REFERENCES

1. Chiou, Y.-C., P.-S. Yang, J.-T. Kuo, and C.-Y. Wu, "Transmission zero design graph for dual-mode dual-band filter with periodic stepped-impedance ring resonator," *Progress In Electromagnetics Research*, Vol. 108, 23–36, 2010.

2. Alkanhal, M. A. S., "Composite compact triple-band microstrip antennas," *Progress In Electromagnetics Research*, Vol. 93, 221–236, 2009.
3. Li, X., S.-X. Gong, L. Yang, and Y.-J. Yang, "A novel Wilkinson power divider for dual-band operation," *Journal of Electromagnetic Waves and Applications*, Vol. 23, Nos. 2–3, 395–404, 2009.
4. Chiang, C. T. and B.-K. Chung, "Ultra wideband power divider using tapered line," *Progress In Electromagnetics Research*, Vol. 106, 61–73, 2010.
5. Li, B., X. Wu, and W. Wu, "A miniaturized branch-line coupler with wideband harmonics suppression," *Progress In Electromagnetics Research Letters*, Vol. 17, 181–189, 2010.
6. Lopez-Berrocal, B., J. de-Oliva-Rubio, E. Marquez-Segura, A. Moscoso-Martir, I. Molina-Fernandez, and P. Uhlig, "High performance 1.8–18 GHz 10-dB low temperature co-fired ceramic directional coupler," *Progress In Electromagnetics Research*, Vol. 104, 99–112, 2010.
7. Wang, T.-Q. and K. Wu, "Size-reduction and band-broadening design technique of uniplanar hybrid ring coupler using phase inverter for M(H)MIC's," *IEEE Trans. Microw. Theory Tech.*, Vol. 47, No. 2, 198–206, Feb. 1999.
8. March, S., "A wideband stripline hybrid ring," *IEEE Trans. Microw. Theory Tech.*, Vol. 16, No. 6, 361, Jun. 1968.
9. Kuo, J.-T., Y.-C. Chiou, and J.-S. Wu, "Miniaturized rat race coupler with microstrip-to-CPW broadside-coupled structure and stepped-impedance sections," *Proc. IEEE Int. Microw. Symp. Dig.*, 169–172, Honolulu, HI, Jun. 2007.
10. Mo, T.-T., Q. Xue, and C.-H. Chan, "A broadband compact microstrip rat-race hybrid using a novel CPW inverter," *IEEE Trans. Microw. Theory Tech.*, Vol. 55, No. 1, 161–167, Jan. 2007.
11. Chiu, L., Q. Xue, and C.-H. Chan, "Performance enhancement of microwave circuits using parallel-strip line," *IEEE Potentials*, Vol. 29, No. 5, 16–21, Sep. 2010.
12. Okabe, H., C. Caloz, and T. Itoh, "A compact enhanced-bandwidth hybrid ring using an artificial lumped-element left-handed transmission-line section," *IEEE Trans. Microw. Theory Tech.*, Vol. 52, No. 3, 798–804, Mar. 2004.
13. Ahn, H.-R. and B. Kim, "Small wideband coupled-line ring hybrids with no restriction on coupling power," *IEEE Trans. Microw. Theory Tech.*, Vol. 57, No. 7, 1806–1817, Jan. 2007.

14. Settaluri, R. K., G. Sundberg, A. Weisshaar, and V. K. Tripathi, "Compact folded line rat-race hybrid couplers," *IEEE Microw. Guided Wave Lett.*, Vol. 10, No. 2, 61–63, Feb. 2000.
15. Kuo, J.-T., J.-S. Wu, and Y.-C. Chiou, "Miniaturized rat race coupler with suppression of spurious passband," *IEEE Microw. Wireless Compon. Lett.*, Vol. 17, No. 1, 46–48, Jan. 2007.
16. Shum, K.-M., Q. Xue, and C.-H. Chan, "A novel microstrip ring hybrid incorporating a PBG cell," *IEEE Microw. Wireless Compon. Lett.*, Vol. 11, No. 6, 258–260, Jun. 2001.
17. Eccleston, K. W. and S. H. M. Ong, "Compact planar microstripline branch-line and rat-race coupler," *IEEE Trans. Microw. Theory Tech.*, Vol. 51, No. 10, 2119–2125, Oct. 2003.
18. Hirota, T., A. Minakawa, and M. Muraguchi, "Reduced-size branch-line and rat-race hybrids for uniplanar MMIC's," *IEEE Trans. Microw. Theory Tech.*, Vol. 38, No. 3, 270–275, Mar. 1990.
19. Chin, K.-S., K.-M. Lin, Y.-H. Wei, T.-H. Tseng, and Y.-J. Yang, "Compact dual-band branch-line and rat-race couplers with stepped-impedance-stub lines," *IEEE Trans. Microw. Theory Tech.*, Vol. 58, No. 5, 1213–1221, May 2010.
20. Kim, D.-I. and G.-S. Yang, "Design of new hybrid-ring directional coupler using  $\lambda/8$  or  $\lambda/6$  sections," *IEEE Trans. Microw. Theory Tech.*, Vol. 39, No. 10, 1779–1783, Oct. 1991.
21. Mandal, M. K. and S. Sanyal, "Reduced-length rat-race couplers," *IEEE Trans. Microw. Theory Tech.*, Vol. 55, No. 12, 2593–2598, Dec. 2007.
22. Kuo, J.-T. and C.-H. Tsai, "Generalized synthesis of rat race ring coupler and its application to circuit miniaturization," *Progress In Electromagnetics Research*, Vol. 108, 51–64, Sep. 2010.
23. Abdelaziz, A. F., T. M. Abuelfadl, and O. L. Elsayed, "Realization of composite right/left-handed transmission line using coupled lines," *Progress In Electromagnetics Research*, Vol. 92, 299–315, 2009.
24. Ye, C.-S., Y.-K. Su, M.-H. Weng, C.-Y. Hung, and R.-Y. Yang, "Design of the compact parallel-coupled lines wideband bandpass filters using image parameter method," *Progress In Electromagnetics Research*, Vol. 100, 153–173, 2010.
25. Lin, Z. and Q.-X. Chu, "A novel approach to the design of dual-band power divider with variable power dividing ratio based on coupled-lines," *Progress In Electromagnetics Research*, Vol. 103, 271–284, 2010.
26. Pozar, D. M., *Microwave Engineering*, 2nd edition, 398–401,

Wiley, New York, 1998.

27. Han, L., K. Wu, and X.-P. Chen, "Accurate synthesis of four-line interdigitated coupler," *IEEE Trans. Microw. Theory Tech.*, Vol. 57, No. 10, 2444–2455, Oct. 2009.
28. Velázquez-Ahumada, M. C., J. Martel, and F. Medina, "Parallel coupled microstrip filters with floating ground-plane conductor for spurious-band suppression," *IEEE Trans. Microw. Theory Tech.*, Vol. 53, No. 5, 1823–1828, May 2005.
29. Tseng, C.-H. and H.-J. Chen, "Compact rat-race coupler using shunt-stub-based artificial transmission lines," *IEEE Microw. Wireless Compon. Lett.*, Vol. 18, No. 11, 734–736, Nov. 2008.