

COPLANAR METAMATERIAL MICRO-RESONATOR

S. Nemer^{1,2,*}, B. Sauviac¹, B. Bayard¹, J. J. Rousseau¹,
C. Nader², J. Bechara², and A. Khoury²

¹Laboratoire LT2C-Université Jean Monnet de Saint-Etienne, France

²Laboratoire LPA-Université Libanaise, Liban

Abstract—We propose a metamaterial coplanar stop-band filter made of multi-turn rectangular spiral particles. Numerical and experimental results show the feasibility of devices with dimensions more than 10 times smaller than those in the literature and with good performances.

1. INTRODUCTION

Micro-resonators are microwave narrow band components that use capacitor-inductor coupling to perform the filtering function. The miniaturization of such circuits is important, but it is more important that they are easily integrated in other circuits. For this reason, coplanar structures are often preferred, but many structures described in the literature are based on microstrip lines. These structures generally have to be extended to obtain sufficient inductive effect while some other planar structures, e.g., [1, 2], require the insertion of a magnetic layer for right operation.

Falcone et al. [3] studied a microwave resonator with planar Split Ring Resonator (SRR). They have proposed wider slots to place the SRR. The size of this micro-resonator is 4.5 cm * 1.8 cm which allows it to function around 7 GHz. The calculation of the resonant frequency of the SRR was determined by Pendry et al. [4]. To achieve this micro resonator to operate in a lower band, between 1 and 2 GHz, it is not enough to reduce the width of the metallization strip forming the SRR, but one needs to increase the diameter of the SRR. The total size of the micro resonator becomes huge compared to the constraints of microelectronics. This is the main disadvantage of this structure for low frequency band.

Received 28 June 2011, Accepted 12 August 2011, Scheduled 17 August 2011

* Corresponding author: Salim Nemer (salimnemer76@hotmail.com).

In this paper, we propose to build a more compact coplanar micro resonator with spiral particles, in place of SRR, to create an artificial material [5]. These particles can be conveniently coupled with a coplanar line to create a stop band filter. Manufacturing is easier than the above mentioned magnetic left handed resonators.

2. CONCEPTION

The challenge for the proper functioning of coplanar micro-resonator [3] is to find a good place to put the resonant particles. In coplanar structures, the particles must be inserted in the slots where the electric field is high. Simultaneously, the access line at each port must be adapted. This requires large line and slots compared to the expected miniaturized circuit.

To resolve this problem, we use the tapered lines structure of Falcone et al. [3] and replace the SRR by more compact rectangular spirals (Figure 1) that were studied earlier by [5]. The surface area of these spirals is much smaller than that of the SRR at the same operating frequency, about 10 times. The size reduction is the main objective and the innovation of this study.

The first part of the work is to show the resonance of the proposed structure that can be used in filtering applications around 2 GHz. Then we improve this structure and manufacture it using 2 or 4 spiral particles.

The materials and geometric dimensions of the multi-turn spiral (Figure 1) were determined from a study presented earlier by Nemer et al. [5], for an operating frequency in the band [1–2 GHz] (Table 1). Two coplanar waveguides, with and without ground plane [6, 7], are studied (Figure 2). A large slot G_L (1300 μm) is necessary to insert the spirals particles, and the width of the transmission line W_l is optimized to obtain a good impedance matching. The metal layer is 6.5 μm thick for technical reasons (deposition process) and greater than the skin

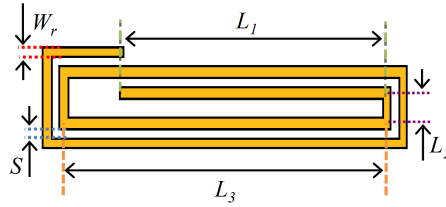


Figure 1. Particle structure with $N = 2$ turns, $W_r = 200 \mu\text{m}$, $S = 200 \mu\text{m}$, $L_1 = 6500 \mu\text{m}$, $L_2 = 600 \mu\text{m}$ and $L_3 = 8000 \mu\text{m}$.

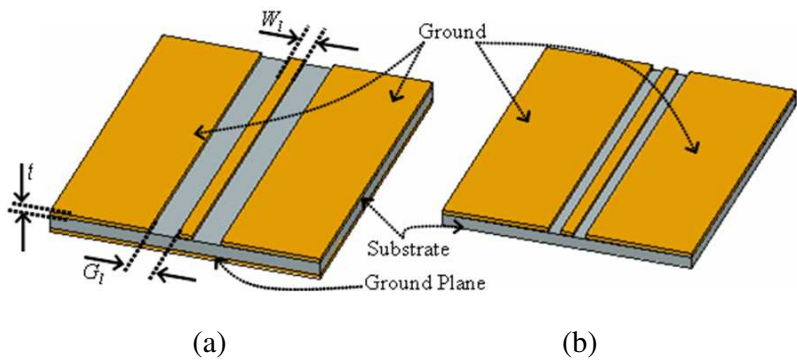


Figure 2. Structure of the coplanar waveguide. (a) With a ground plane. (b) Without a ground plane.

Table 1. Materials characteristic and geometric dimensions of the multi-turn spiral.

Substrate (alumina 98%)						G_l			
height		ε_r	μ_r			CPW		CPWG	
635 μm		9.8	1			245 μm		1300 μm	
Conductor (copper)									
ρ ($\Omega \cdot \text{m}$)	t	W_r	W_l	S	L_1	L_2	L_3	G	G_L
17 · 10 ⁻⁹	6.5 μm	200 μm	635 μm	200 μm	6500 μm	600 μm	8000 μm	200 μm	2200 μm

depth at the working frequency.

The difference between a coplanar waveguide with ground plane (CPWG) and a traditional one (CPW) is the mapping of the electromagnetic fields with two major consequences:

- An interaction with the spiral particles that differs for each structure. This will be discussed later.
- A different set of line dimensions to obtain a good impedance matching. These dimensions can be calculated from the equation of Wheeler and Owens that can be found in several references such as [8].

The width of the central line of the component (W_l) is set to 635 μm , and the corresponding slot width (G_l) must be set to 245 μm for CPW and to 1300 μm for CPWG to reach 50 ohms characteristic impedance. On the other hand, a large slot width (G_L) of about

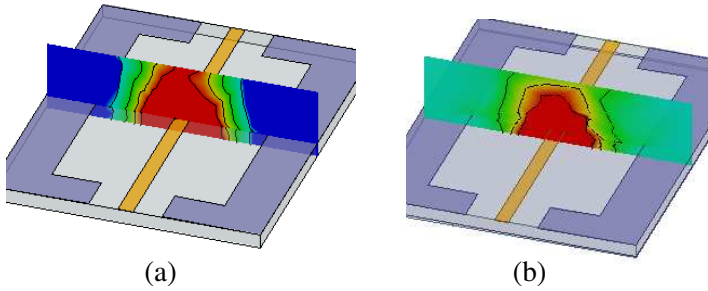


Figure 4. Magnitude of magnetic field around the transmission line in the large slot. (a) Without a ground plane (CPW). (b) With a ground plane (CPWG).

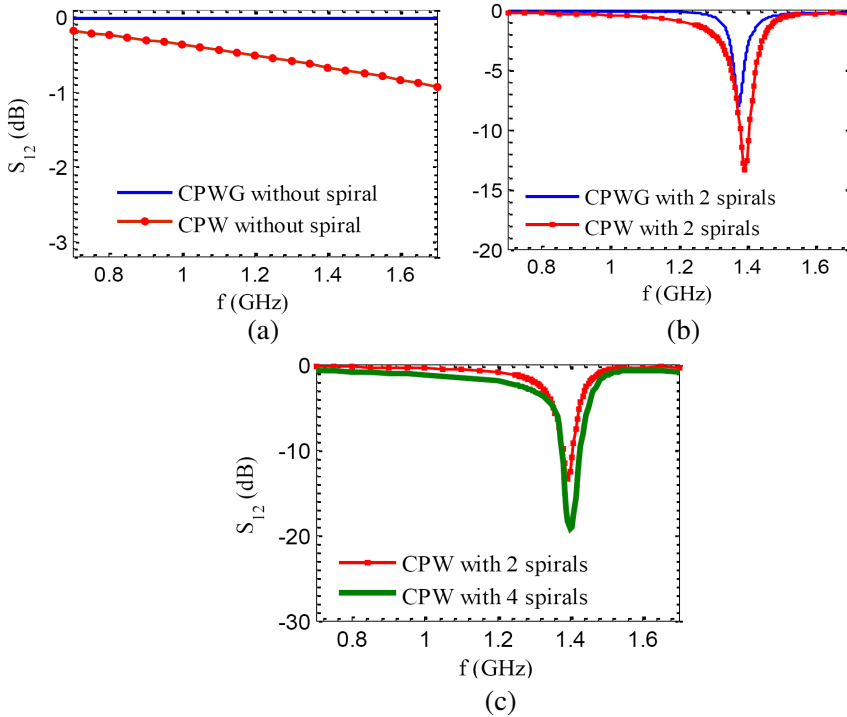


Figure 5. Simulated transmission coefficient of the micro-resonator. With $N = 2$ turns, $W_r = 635 \mu\text{m}$, $W_l = 635 \mu\text{m}$, $G_l = 1300 \mu\text{m}$, $G = 200 \mu\text{m}$, $S = 200 \mu\text{m}$, $L_1 = 6500 \mu\text{m}$, $L_2 = 600 \mu\text{m}$, $L_3 = 8000 \mu\text{m}$. (a) CPWG and CPW without spiral. (b) CPWG and CPW with 2 spirals. (c) CPW with 2 and 4 spirals.

along the propagation line with four particles. Then the peak depth reaches 19 dB (Figure 5(c)).

4. MEASUREMENTS RESULTS

To validate our study, we present experimental results of the CPW micro resonator structure. The materials used in the micro-resonator are an alumina substrate ($\epsilon_r = 9.8$, thickness = $635 \mu\text{m}$) and a copper metallic layer ($\rho = 17 \cdot 10^{-9} \Omega \cdot \text{m}$, thickness = $6 \mu\text{m}$). Two different prototypes are realized and measured, a CPW line with 2 spiral particles (Figure 6(a)) and 4 spiral particles (Figure 6(b)), in order

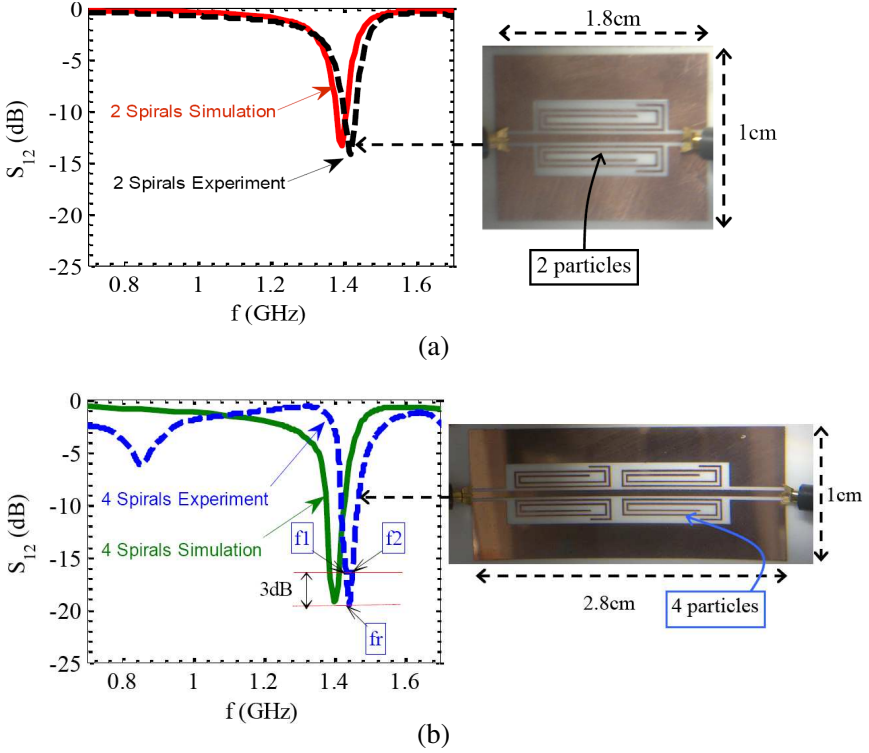


Figure 6. Experimental result of the insertion loss S_{12} (dB) for 2 and 4 particles. Such as: $N = 2$ turns, $W_r = 200 \mu\text{m}$, $W_l = 635 \mu\text{m}$, $G_l = 1300 \mu\text{m}$, $G = 200 \mu\text{m}$, $S = 200 \mu\text{m}$, $L_1 = 6500 \mu\text{m}$, $L_2 = 600 \mu\text{m}$, $L_3 = 8000 \mu\text{m}$. (a) Two particles placed on both sides of the transmission line. (b) Four particles placed on both sides of the transmission line.

to increase the rejection magnitude. The transmission characteristic of the micro-resonators is measured using a vector network analyzer (VNA) associated with a coplanar probe station.

The measurements show the resonance phenomenon near 1.4 GHz, and a very good agreement is observed between simulated and experimental results (Figure 6). A small frequency shift ($\Delta_f \approx 2.7\%$) can be noticed between the measured resonant frequency (Figure 5(d)) and simulated one (Figure (6)). The peak depths are high. We obtained peak depths of 14.25 dB for two particles and 19.40 dB for four particles. Insertion losses slightly increase from 0.47 dB to 1.30 dB, respectively, at 1.6 GHz, above the resonance. The 3 dB bandwidth is about 120 MHz in the case of 4 particles, and the quality factor is about 85 (Eq. (1))

$$Q = \frac{fr}{f_2 - f_1} = \frac{1.444}{1.451 - 1.434} \approx 85 \quad (1)$$

The structure with four particles shows secondary resonances (near 0.8 GHz). These effects are due to the increased length of the mismatched line. This length was however necessary to insert the four particles.

The experimental results show that our proposed micro resonator has a mean quality factor $Q = 85$ and a resonance peak over 19 dB. This is a good result since the size of the device is really compact. Thus, this micro resonator (CPW) with spiral particles is much better than that with SRR particles [3] according to those criterions. The dimensions of the equivalent SRR structure would be 15 times greater to operate in the same frequency band.

5. CONCLUSION

A coplanar micro resonator has been designed and realized. The device is based on the Falcone's structure [3], by replacing wide SRR with compact rectangular spiral particles. The most interesting advantages of the proposed micro resonator are its small dimensions (10 mm * 28 mm * 0.639 mm) for operation in the band of 1 to 2 GHz. The numeric and experimental studies have demonstrated efficient rejection (−19 dB) in the rejection band, low insertion losses (< 1.30 dB) in the pass band, and very sharp cutoff. In conclusion, this device and its characteristics are very interesting, considering that the structure is fully compatible with low cost industrial processes (simple manufacturing, one print).

These results allow us to draw some perspectives. This study can be the baseline for studying other micro resonators operating at other frequencies (especially between 1 & 10 GHz).

REFERENCES

1. Boukchiche, F., T. Zhou, M. Le Berre, D. Vincent, B. Payet-Gervy, and F. Calmon, "Novel composite non reciprocal right/left-handed line made from ferrite material," *PIERS Proceedings*, 700–702, Cambridge, USA, Jul. 5–8, 2010.
2. Zermane, A., B. Sauviac, B. Bayard, and A. Benghalia, "Numerical study of a coplanar zeroth-order resonator on YIG thin film," *PIERS Proceedings*, 1025–1028, Marrakesh, Morocco, Mar. 20–23, 2011.
3. Falcone, F., F. Martin, J. Bonache, R. Marqués, and M. Sorolla, "Coplanar waveguide structures loaded with split-ring resonators," *Microwave and Optical Technology Letters*, Vol. 40, No. 1, Jan. 5, 2004.
4. Pendry, J. B., A. J. Holden, D. J. Robbins, and W. J. Stewart, "Magnetism from conductors and enhanced nonlinear phenomena," *IEEE Trans. Microwave Theory Tech.*, Vol. 47, 2075, 1999.
5. Nemery, S., B. Sauviac, B. Bayard, C. Nader, J. Bechara, and A. Khoury, "Modelling resonance frequencies of a multi-turn spiral for metamaterial applications," *Progress In Electromagnetics Research C*, Vol. 20, 31–42, 2011.
6. Ganguly, A. and B. E. Spielman, "Dispersion characteristics for arbitrarily-configured transmission media," *IEEE Trans. Microwave Theory Tech.*, Vol. 25, No. 12, 1138–1141, Dec. 1977.
7. Spielman, B. E., "Integrated circuit media for millimetre-wave applications," *AGARD Conference Proceedings*, 245, The Advisory Group for Aerospace Research and Development, 1979.
8. Wadell, B. C., *Transmission Line Design Handbook*, 79, Artech House, Boston, 1991.