Progress In Electromagnetics Research Letters, Vol. 105, 49–56, 2022

A Filtering Dielectric Resonator Antenna Using CPW Fed for Sub-6 GHz Applications

Chuanyun Wang, Lina Wang*, Yonghua Zhang, Weikang Hu, and Xiaofeng Jiang

Abstract—A filtering dielectric resonator antenna (FDRA) using an inductive CPW (coplanar waveguide) feed structure is proposed. Simultaneously, a pair of slotline stubs are respectively loaded on the signal line and ground of the CPW feed structure, which is used to generate radiation nulls near the edges of the passband. Furthermore, the two radiation nulls can be controlled independently by adjusting the length of the loaded two pairs of slotline stubs. In addition, it is interesting that TE_{111} mode is split due to the different loading effects of slotline stubs in feed network, thereby three resonances in the passband are formed. Finally, an FDRA with quasi-elliptic function response is realized without additional filtering circuit. The prototype of the FDRA operating at 3.53 GHz was fabricated and measured to verify the design validity. The measured results show that the impedance bandwidth is 13.6% (3.29–3.77 GHz); the gain is basically stable at 5.7 dBi within the passband; and the two radiation nulls are located at 3.05 GHz and 3.88 GHz, respectively.

1. INTRODUCTION

Filtering antennas have attracted the attention of many researchers due to their multi-functional integration and compact structure [1, 2]. Compared with the microstrip antenna, dielectric resonator antenna (DRA) has the advantages of high degrees of design freedom, high gain, and low loss [3–5] which is suitable for a variety of application scenarios. Consequently, filtering dielectric resonator antenna (FDRA) has received some attention. At present, there are two main design approaches of filtering antenna: comprehensive design approach and fusion design approach. The comprehensive design approach is mainly to introduce filters in the feed structure. For example, in [6] a bandpass filter is cascaded in the feed network, and then a rectangular FDRA using slot coupling is implemented. In [7], by integrating two different pairs of band-stop resonators in the feed source, four transmission zeros are generated on two sides of the passband to provide a filtering response for the rectangular DRA. In [8], a four-leaf-clover-shaped dielectric resonator is excited with a pair of filtering baluns to realize the filtering response. However, comprehensive design approach increases circuit size and insertion loss. For the fusion design approach, the filtering function of the DRA can be realized by introducing parasitic elements on the feeding microstrip or in the DRA. In [9], a compact FDRA with a quasi-elliptic bandpass response is obtained and is fed by a microstrip-coupled slot, and two parasitic strips are parallelly added on two sides of the microstrip feedline to achieve better out-of-band suppression. In [10], a thin metal strip and two open stubs are used to establish cross coupling to generate two radiation nulls at their passband edges, enabling a DRA with a bandpass filtering response without any filtering circuit. In [11], by introducing a double-ring loop structure into the cylindrical DRA, the internal fields of the dielectric resonator at a needed frequency can cancel out, and two radiation nulls located on two sides of the passband are generated to realize the filtering response. This approach does not require additional filtering circuits, which makes the circuit structure more compact.

Received 10 April 2022, Accepted 22 June 2022, Scheduled 18 July 2022
* Corresponding author: Lina Wang (17839192882@163.com).
The authors are with the School of Information Engineering, East China Jiaotong University, Nanchang 330013, China.

Additionally, DRA can be easily excited by different feeding methods, such as coaxial probe [12], slot-coupled microstrip [13], microstrip [14], and coplanar waveguide (CPW) [15]. Compared with traditional microstrip feed, CPW has the characteristics of low loss and small dispersion, which provides a more efficient excitation mechanism for DRA [16]. In addition, the single-planar nature of CPW-feed makes it easier to fabricate than slot-coupled microstrip or probe feed. The active integration of the vias can be avoided by the ground and signal line in the same plane, and the simple structure is more convenient to connect with other devices [17, 18]. In [19] and [20], a coplanar-waveguide (CPW) series short stub is proposed, which is used as a band-stop structure, and the stopband center frequency can be controlled by changing the length of the short-end. In [21], a novel CPW-fed coupling scheme of a rectangular DRA is proposed and studied, but this design has no filtering function.

In this letter, a CPW-fed FDRA based on the fusion design method is proposed. Slotline stubs of different lengths are respectively loaded on the signal line and ground of the CPW feed to obtain two radiation nulls, and the position of the radiation nulls can be controlled separately by changing the length of the slotline stubs. Also, due to the loaded slotline stubs, the antenna bandwidth is widened. Relative analysis and discussion are provided in the following contents of this letter.

2. ANTENNA DESIGN

In this design, the fusion design of filtering DRA is realized by loading slotline stubs on the CPW fed structure, which makes full use of the advantages of easy integration of CPW fed structure. Finally, a compact FDRA is implemented, and the specific structure and design process of the antenna are as follows.

2.1. Antenna Configuration

Figure 1 shows the configuration of the proposed FDRA. It is mainly composed of a dielectric substrate and a rectangular DR. The antenna adopts a CPW inductive feed structure, and two pairs of slotline stubs are etched on the signal line and the ground of the CPW feed structure, respectively. Fig. 1(c) shows the equivalent circuit model of the FDRA, and the equivalent model of the loaded slotline stubs is marked by the dashed line box. The slotline stubs on the ground are modeled as a series C_1 and L_1. When it resonates, the circuit is in a short-circuit state, which can form a radiation null. Then, the slotline stubs on the signal line are modeled by parallel C_2 and the L_2. When it resonates, the circuit is in an open state, and a radiation null is also formed. The dielectric substrate adopts F4BRM with a relative permittivity of $\varepsilon_{r1} = 4.5$ and thickness of 1.6 mm. The overall size of antenna is 40 mm $*$ 60 mm. The rectangular DR uses TMC composite material with a relative permittivity of $\varepsilon_{r2} = 10$, and the operating mode selects the fundamental mode of the dielectric resonator, that is, the TE_{111} mode. The main parameters of the antenna are shown in Table 1.

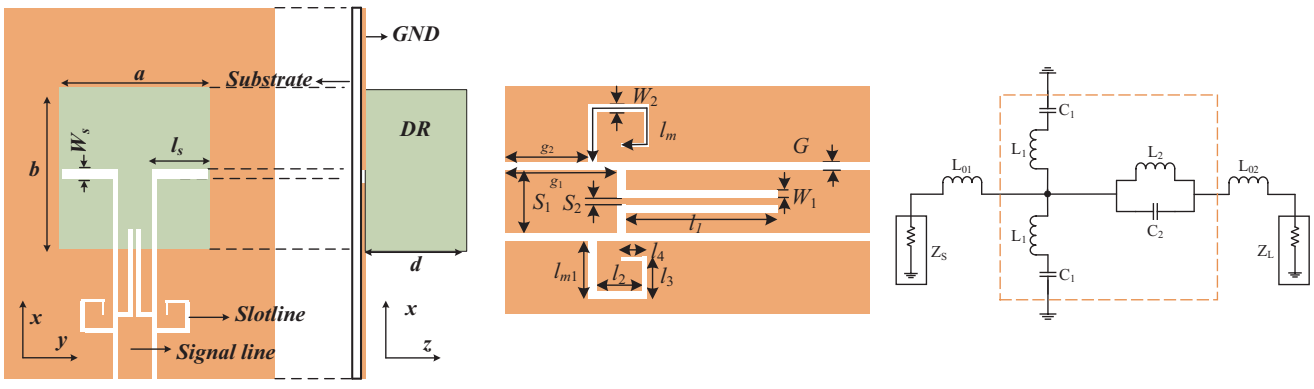

Figure 1. Configuration of the proposed FDRA. (a) Top and side views. (b) Feeder structure. (c) Equivalent circuit model of the FDRA.

Table 1. Main design parameters of antenna (mm).

a	b	d	S_1	S_2	G	g_1	g_2	l_s	l_1	l_m	l_2	W_s	W_1	W_2
20.42	22.8	10.4	3.9	0.2	0.3	7.68	6	6.3	13	12.35	3.85	0.5	0.3	0.9

2.2. Operating Principle of FDRA

In order to better explain the operating principle of FDRA, the evolution process of the proposed antenna feeding network is given, as shown in Fig. 2. Their corresponding simulated gain and S_{11} results are shown in Fig. 3.

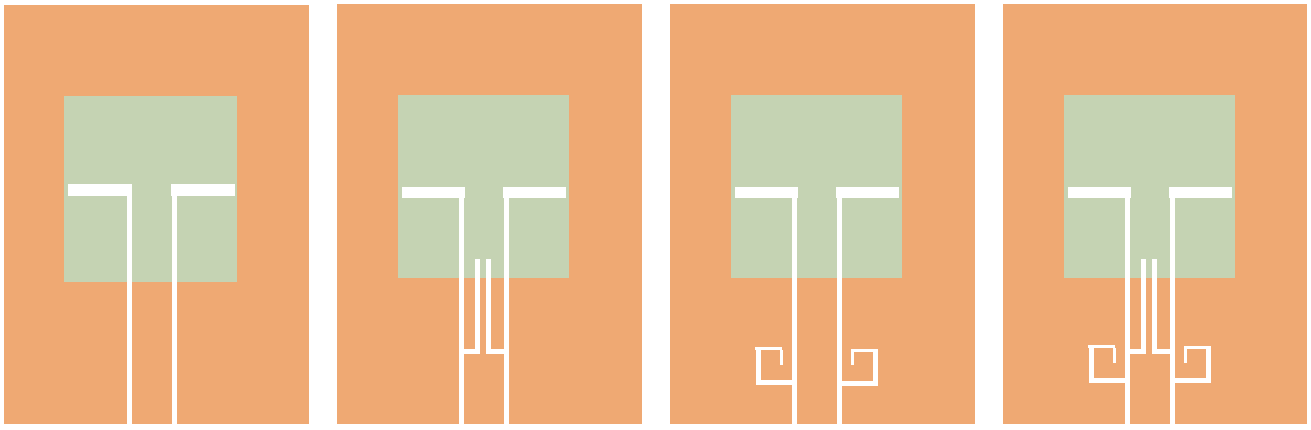

(a) Antenna I (b) Antenna II (c) Antenna III (d) Antenna IV

Figure 2. Antenna configurations. (a) Reference Antenna I. (b) Reference Antenna II. (c) Reference Antenna III. (d) Proposed Antenna IV.

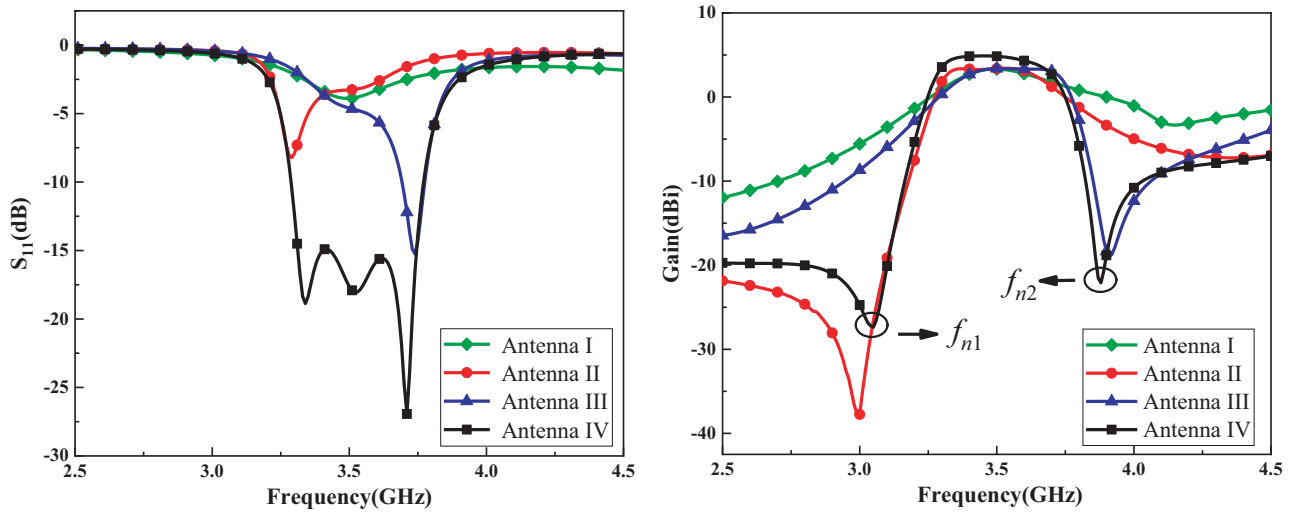

(a) (b)

Figure 3. S_{11} and gain of the reference antennas and the proposed filtering antenna. (a) S_{11}. (b) Gain.

As shown in Fig. 3(a), Antenna Ihasonlyone resonant mode is the TE_{111} mode of the DRA. However, there is no filtering function. In order to achieve the filtering function, two pairs of slotline stubs are loaded on the signal line and ground of CPW-fed structure. In Antenna II and Antenna III, besides

the DR resonant mode, another resonant mode is obtained in the passband due to the effect of the loaded slotline stubs respectively. More importantly, it can be seen from Fig. 3(b) that the loaded slotline stub can introduce a radiation null(f_{n1} or f_{n2}) at one side of the antenna passband. Antenna IV is the proposed FDRA in this paper when two pairs of slotline stubs are loaded in Antenna IV simultaneously, and two radiation nulls (f_{n1} and f_{n2}) are generated at both sides of the passband of the proposed FDRA, which realizes the filtering function. Moreover, according to the analysis of Antenna II and Antenna III, three resonances should be formed in the passband as shown in Fig. 3(a), and the resonance frequencies are 3.33, 3.51, and 3.71 GHz, respectively.

Figure 4 shows the E-field distributions at three resonances within the passband of the proposed antenna. According to the E-field distributions, it can be seen that the three resonant frequencies are all TE_{111} mode of the DRA. It can be considered that the TE_{111} mode is split due to the different loading effects of slotline stubs [22], so three resonances are formed. Compared with the traditional CPW inductive feed DRA, the proposed FDRA broadens the bandwidth and flattens the in-band gain of the antenna.

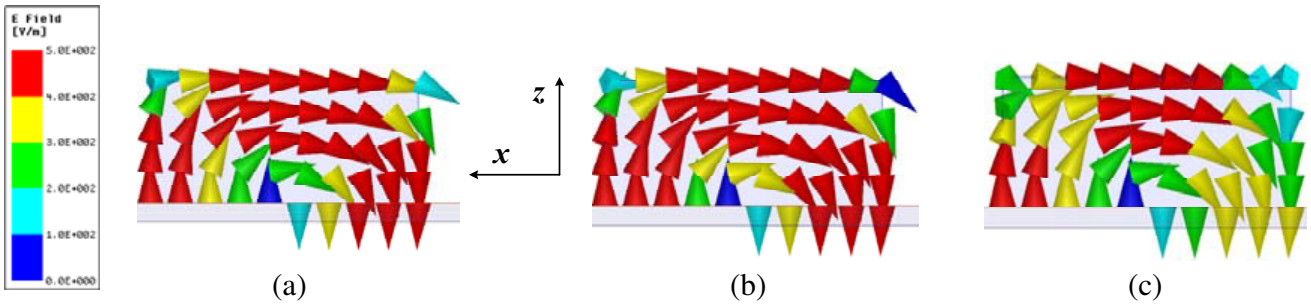

Figure 4. Simulated E-fields variation within DRA. (a) 3.33 GHz. (b) 3.51 GHz. (c) 3.71 GHz.

2.3. Parameter Analysis

In this section, the effect of the loaded slotline stubs on the two radiation nulls respectively are analyzed in detail. According to the simulation results, the frequencies of the radiation nulls can be adjusted by changing the corresponding the length of the slotline stubs. As shown in Fig. 5(a), it can be observed

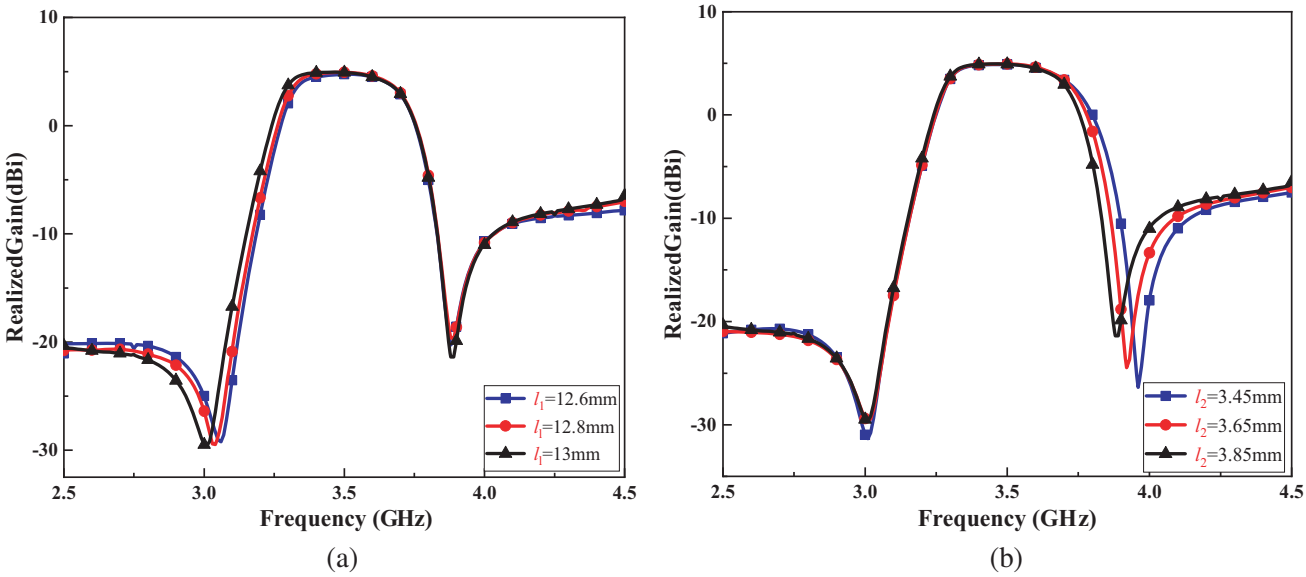

Figure 5. Simulated realized gains of the proposed FDRA for different (a) l_1, (b) l_2.

that f_{n1} moves to the low frequency with the increase of l_1, while f_{n2} is almost unchanged, so f_{n1} can be changed by adjusting the length l_1 of the slotline stubs on the signal line of the CPW feed structure. As shown in Fig. 5(b), as l_2 increases, f_{n2} moves to the low frequency, and f_{n1} is basically unchanged; therefore, f_{n2} is controlled by the length l_2 of the slotline stubs on the ground of the CPW feed structure. It can be deduced from Fig. 1(b) that l_m denotes the total length of the slotline stubs on the ground, that is $l_m = l_{m1} + l_2 + l_3 + l_4$, so the influence of $l_{m1}l_3$ and l_4 on f_{n2} is similar to that of l_2, which will not be described in detail due to space limitation.

3. RESULTS AND DISCUSSION

To verify the correctness of the design, as shown in Fig. 6, a prototype of the proposed FDRA operating at 3.53 GHz is fabricated and measured. The simulated and measured results of S_{11} and realized gain of the prototype are shown in Fig. 7. It can be seen that the simulated and measured results are basically consistent. The measured 10 dB impedance bandwidth is about 13.6% (3.29–3.77 GHz), and the peak gain within the passband is about 5.7 dBi. The two radiation nulls are located at 3.05 GHz and 3.88 GHz, and the out-of-band suppression levels reach −25 dB and −17 dB, respectively.

Figure 8 shows the radiation patterns of the E-plane ($\phi = 0°$) and H-plane ($\phi = 90°$) of the prototype at 3.33, 3.51, and 3.71 GHz, respectively. Since the three frequencies are all TE_{111} modes, the radiation patterns are basically similar. It can be seen that the DRA has a good radiation performance, and the main radiation performance of the antenna is stable. The co-polarization of the antenna is lower than −20 dB. The small deviations between measured and simulated results can be attributed to the inaccuracy in fabrication and implementation, especially the air gap between DR and the substrate due to glue bonding.

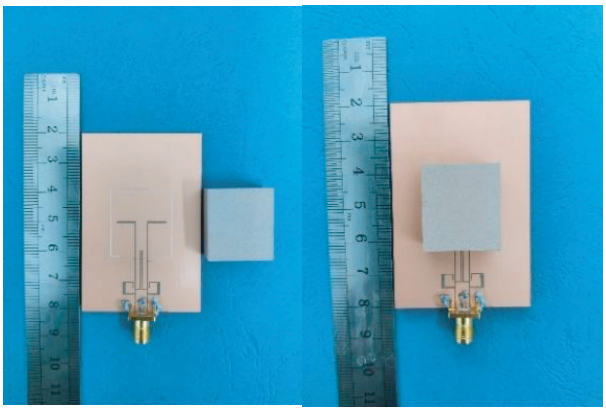

Figure 6. A prototype of the proposed FDRA.

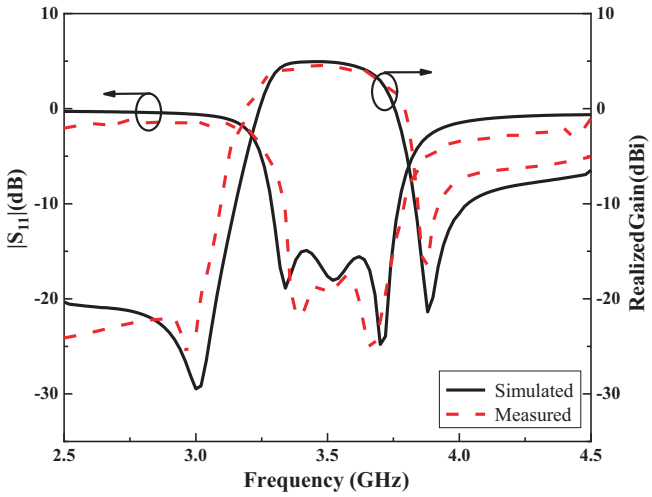

Figure 7. Simulated and measured S_{11} and realized gain of the prototype.

Table 2. Performance comparison between the proposed antenna and other published antennas.

Ref.	Center frequency (GHz)	Bandwidth (%)	Gain (dBi)	Extra filtering circuits	Radiation nulls individual control
[6]	8.15	6.13	5.3	Yes	No
[8]	2.6	9.10	5.5	Yes	No
[10]	5	20.4	5	No	No
proposed	3.52	13.6	5.7	No	Yes

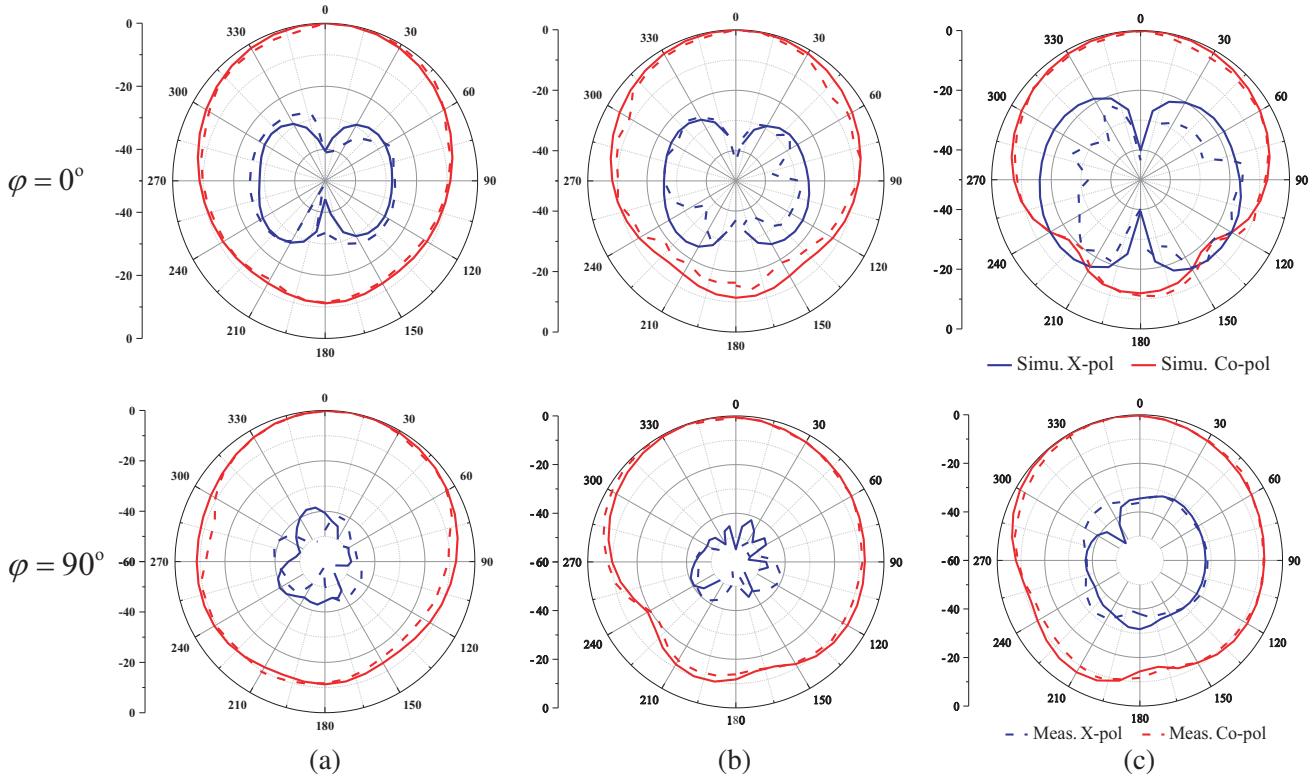

Figure 8. Simulated and measured radiation patterns of the FDRA. (a) 3.33 GHz. (b) 3.51 GHz. (c) 3.71 GHz.

The comparison between the proposed structure and other published articles is shown in Table 2. It can be seen that the proposed filtering DRA has higher gain and bandwidth, and compared with other antennas, it has the advantages of independently controllable radiation nulls and does not need a cascade filtering circuit.

4. CONCLUSION

In this letter, a novel FDRA using CPW-fed is proposed. By introducing two pairs of slotline stubs into the signal line and the ground on the CPW feed structure, respectively, two independently controllable radiation nulls are generated, which improves the out-of-band selectivity of the antenna. In addition, since the loading slotline stubs affect the impedance characteristics of the antenna, the TE_{111} mode is separated, and three resonances are generated in the passband, which effectively broaden the antenna bandwidth to 13.6%, and the gain of the antenna in the passband tends to be flattened. The maximum gain reaches 5.7 dBi. Meanwhile, since the antenna adopts CPW-feed, the antenna structure is simple and easy to manufacture. The operating frequency of the antenna covers the Sub-6 GHz, which can reduce the use of filtering circuit components in the applied communication system to a certain extent.

ACKNOWLEDGMENT

This work was supported in part by the National Natural Science Foundation of China under Grant 61661021 and 61901170, in part by the Natural Science Foundation of Jiangxi Province under Grant 20202BABL202008 and the Science and Technology Plan Project of Jiangxi Province under Grant 20202ACBL212002, 20204BCJ23007.

REFERENCES

1. Wang, H. Y., G. Zhao, and R. Y. Li, "A low-profile half-mode substrate integrated waveguide filtering antenna with high frequency selectivity," *Progress In Electromagnetics Research Letters*, Vol. 99, 35–43, Jul. 2021.
2. Shome, P. P., T. Khan, and S. K. Koul, "Filtenna designs for radio-frequency front-end systems: A structural-oriented review," *IEEE Antennas and Propagation Magazine*, Vol. 63, No. 5, 72–84, Oct. 2021.
3. Petosa, A., A. Ittipiboon, and Y. M. Mantar, "Recent advances in dielectric-resonator antenna technology," *IEEE Antennas and Propagation Magazine*, Vol. 40, No. 3, 35–48, Jun. 1998.
4. Petosa, A. and A. Ittipiboon, "Dielectric resonator antennas: A historical review and the current state of the art," *IEEE Antennas and Propagation Magazine*, Vol. 52, No. 5, 91–116, Oct. 2010.
5. Hu, P. F., Y. M. Pan, and X. Y. Zhang, "Broadband filtering dielectric resonator antenna with wide stopband," *IEEE Transactions on Antennas and Propagation*, Vol. 65, No. 4, 2079–2084, Apr. 2017.
6. Sahoo, A. K., R. D. Gupta, and M. S. Parihar, "Circularly polarised filtering dielectric resonator antenna for X-band applications," *IET Microwaves, Antennas & Propagation*, Vol. 12, No. 9, 1514–1518, 2018.
7. Ballav, S., G. A. Sarkar, and S. K. Parui, "High-selective filtering dielectric resonator antenna by integrating band-rejection resonators in Feedline," *Sādhanā*, Vol. 46, No. 2, 1–8, Feb. 2021.
8. Tang, H., C. Tong, and J. X. Chen, "Differential dual-polarized filtering dielectric resonator antenna," *IEEE Transactions on Antennas and Propagation*, Vol.66, No. 8, 4298–4302, Aug. 2018.
9. Hu, P. F., Y. M. Pan, and X. Y. Zhang, "A compact filtering dielectric resonator antenna with wide bandwidth and high gain," *IEEE Transactions on Antennas and Propagation*, Vol. 64, No. 8, 3645–3651, Aug. 2016.
10. Gao, Y., Y. C. Jiao, and Z. B. Weng, "A filtering dielectric resonator antenna with high band-edge selectivity," *Progress In Electromagnetics Research M*, Vol. 89, 63–71, 2020.
11. Liu, Y. T., K. W. Leung, and J. Ren, "Linearly and circularly polarized filtering dielectric resonator antennas," *IEEE Transactions on Antennas and Propagation*, Vol. 67, No. 6, 3629–3640, Jun. 2019.
12. Hu, P. F., Y. M. Pan, and K. W. Leung, "Wide-/dual-band omnidirectional filtering dielectric resonator antennas," *IEEE Transactions on Antennas and Propagation*, Vol. 66, No. 5, 2622–2627, May 2018.
13. Wang, C. Y., Z. W. Han, and H. W. Liu, "A novel single-feed filtering dielectric resonator antenna using slotline stepped-impedance resonator," *IEEE Transactions on Circuits and Systems II: Express Briefs*, Vol. 68, No. 11, 3426–3430, Nov. 2021.
14. Pan, Y. M., P. F. Hu, and K. W. Leung, "Compact single-/dual-polarized filtering dielectric resonator antennas," *IEEE Transactions on Antennas and Propagation*, Vol. 66, No. 9, 4474–4484, Sept. 2018.
15. Kumar, P., S. Dwari, and S. Singh, "Conductor backed CPW-fed dual-mode excited high gain cylindrical cavity DRA for Unmanned Aircraft Systems (UAS) or drone data-link applications at C band," *IETE Technical Review*, Vol. 36, No. 5, 463–474, Sept. 2019.
16. Ghosh, B., Y. M. M. Antar, and A. Petosa, "CPW feed to rectangular DRA," *Microwave and Optical Technology Letters*, Vol. 45, No. 3, 210–216, May 2005.
17. Ballav, S. and S. K. Parui, "A wideband dielectric resonator antenna array using air-bridgeless coplanar waveguide power divider," *International Journal of RF and Microwave Computer-Aided Engineering*, Vol. 29, No. 9, e21858, May 2019.
18. Messaoudene, I., T. A. Denidni, and A. Benghalia, "A hybrid integrated ultra-wideband/dual-band antenna with high isolation," *International Journal of Microwave and Wireless Technologies*, Vol. 8, No. 2, 341–346, Mar. 2016.
19. Masood, R. and S. A. Mohsin, "Optimization of the S-parameter response of a coplanar waveguide series short stub for broadband applications," *IEEE International Conference on Communications and Electronics*, 384–388, Dec. 2010.

20. Dib, N. I., L. P. B. Katehi, and G. E. Ponchak, "Theoretical and experimental characterization of coplanar waveguide discontinuities for filter applications," *IEEE Transactions on Microwave theory and Techniques*, Vol. 39, No. 5, 873–882, May 1991.
21. Al Salameh, M. S., Y. M. M. Antar, and G. Seguin, "Coplanar-waveguide-fed slot-coupled rectangular dielectric resonator antenna," *IEEE Transactions on Antennas and Propagation*, Vol. 50, No. 10, 1415–1419, Oct. 2002.
22. Ballav, S., G. A. Sarkar, and S. K. Parui, "High-selective filtering dielectric resonator antenna by integrating band-rejection resonators in feedline," *Sādhanā*, Vol. 46, No. 2, 1–8, Apr. 2021.